

# Industrial Hose Reels

| Washdown | Chemical Transfer | Potable Water | Food Processing | Bottling Plants |  
| Pharmaceuticals & Cosmetics | Fueling | Fire Protection | Dairy Operations |



**You Can't Buy  
A Better Reel.**

Family owned and operated since 1933

# CONTENTS

Hannay hose reels come in all sizes and capacities.

Hannay Reels is the leading manufacturer of high quality hose and cable reels for most every conceivable application. This catalog describes and gives specifications on our most popular hose reels. If you don't see what you're looking for, give us a call and we will help you meet your needs.

Hannay Reels offers aluminum, carbon and stainless steel construction for most models.

Special coatings and finishes are also available.

| Reel Type                                                                                | I.D. Hose Sizes      | Page  |
|------------------------------------------------------------------------------------------|----------------------|-------|
| Hannay Reels Policies – Our Guarantee, Service Policy, Paint Notice, Return Goods Policy |                      | 3     |
| Hannay Reels Spec Worksheet                                                              |                      | 4     |
| Hose Assemblies, Mounting Hole Sizes                                                     |                      | 5     |
| <b>Spring Rewind Reels</b>                                                               |                      |       |
| Series AG                                                                                | 1/4" – 1-1/2"        | 6-7   |
| Series N400                                                                              | 1/4" or 3/8"         | 8     |
| Series N500 (high pressure)*                                                             | 1/4" or 3/8"         | 9     |
| Series N600 (dual hose)                                                                  | 1/4" – 1/2"          | 10    |
| Series 600 (dual hose)                                                                   | 1/4" – 3/4"          | 11    |
| Series N700*                                                                             | 1/4" – 1/2"          | 12    |
| Series 700*                                                                              | 1/4" – 1/2"          | 13    |
| Series N800*                                                                             | 3/4" or 1"           | 14    |
| Series 800*                                                                              | 3/4" or 1"           | 15    |
| Series 900*                                                                              | 1-1/4" or 1-1/2"     | 16    |
| <b>Compact Manual Rewind Reels</b>                                                       |                      |       |
| Series 1000                                                                              | 1/4" or 3/8" or 1/2" | 17    |
| <b>Manual or Power Rewind Reels</b>                                                      |                      |       |
| Series 1500                                                                              | 1/4" – 5/8"          | 18    |
| Series 1800                                                                              | 5/8" or 3/4"         | 19    |
| Series 2000 (dual hose)                                                                  | 1/4" – 1/2"          | 20    |
| Series G2000 (dual hose, manual only)                                                    | 1/4" – 1/2"          | 21    |
| Series 3000 (manual only)                                                                | 3/4" or 1"           | 22    |
| Series 3500 (manual only)                                                                | 1" – 1-3/4"          | 23    |
| Series 4000                                                                              | 3/4" or 1"           | 24    |
| Series G4100                                                                             | 3/4" or 1"           | 25    |
| Series 6000                                                                              | 1/2" – 1"            | 26-27 |
| Series 7000 (dual hose)                                                                  | 3/4" or 1"           | 28    |
| Series 7500*                                                                             | 1" – 1-1/2"          | 29    |
| Series 8000                                                                              | 1-1/2" or 2"         | 30    |
| Series 9000                                                                              | 2" – 3"              | 31    |
| <b>Portable Hose Reels on Wheels</b>                                                     |                      |       |
| Series 1100, AT1200                                                                      | 3/8" – 1"            | 32    |
| <b>Portable Storage Reels on Wheels</b>                                                  |                      |       |
| Series C1150, ATC1250                                                                    | NA                   | 33    |
| <b>Storage Reels: Manual or Power Rewind</b>                                             |                      |       |
| Series C1500                                                                             | 1/4" – 1"            | 34    |
| Series C3200 (manual only)                                                               | 1/2" – 1-1/2"        | 35    |

\* Reel is appropriate for fuel/lubrication applications



## Hannay Reels: The industry choice.

Designed to spec and built of the highest quality materials, our reels stand up to the most demanding conditions of any industry. We offer thousands of hose and cable reels that help improve efficiency, productivity, and safety in your operation by keeping hoses and cables organized and off the floor.

The heavy-duty design and construction of our reels ensure that they outlast the competition and save you money. And bolted-on components and conveniently located swivel joints make servicing our reels quick and trouble-free.

Every reel we build is created for the industry in which it will be used, from processing to welding to maintenance and more – never retrofitted to the job. That means you can trust Hannay reels to be durable and dependable for years to come.

### Uses:

- Blasting/slurry
- Hydraulic/pneumatic power tools
- Washdown and sanitation
- Chemical transfer
- Power wash/steam cleaning
- Potable water
- Pressurized air
- Gas welding
- Fuel and lubrication
- Electric cable for lights, tools, and machinery
- In-plant firefighting
- Vacuum and suction



# Hannay Reels **Sales Policies**

## Our Guarantee and Service Policy - 2 Year Warranty

Equipment manufactured by Hannay Reels, Inc. is guaranteed for **2 years** from date of shipment when installed according to our instructions, given proper care, and used for the purpose for which it is designed.

Equipment which proves to be defective upon our inspection will be replaced free of charge, including freight to the customer. Our responsibility ceases upon delivery to any common carrier and we do not, unless previously instructed, insure shipments beyond point of delivery to such carrier. No material will be accepted for return without a return goods authorization. No allowance will be made for labor charges incurred in making exchanges, replacements or repairs.

**Components (including hose and cable) which are manufactured by other vendors will be subject to the warranty terms of their own manufacturers.**

**Also excluded from the general guarantee are normal wear items (including seals, motor brushes, and paint finish).**

We reserve the right to modify or alter materials, dimensions, design, and construction when necessary to improve the performance of the reel and/or accessories, or to meet delivery requirements.

**Failure to use a properly sized circuit breaker with any electric rewind motor will void warranty on motor.**

**Failure to use a flexible connector with any live hose reel will void warranty on swivel joint.**

We expressly disclaim any liability for damage or injuries resulting from the use, operation, service, maintenance or failure of equipment.

## Notice on Reel Finish

Standard finish on Hannay reels is a high performance modified acrylic enamel paint. Standard color is metallic graphite. Other colors available at no additional cost include red, white, black, and primer.

Most of the major components on standard reels are e-coated prior to receiving final topcoat paint finish. This combination of e-coat and enamel topcoat will meet the finish requirements of most customer applications and environments.

In cases where requirements cannot be met with the standard finish, Hannay Reels can coat any model reel with an automotive primer, allowing application of final coating at your facility. Alternatively, Hannay Reels can provide a quote for matching a customer-provided paint specification. For further information, please contact your Hannay Reels sales engineer and a special paint request form will be sent to you.

For environments where no paint finish is suitable, we offer both aluminum and stainless steel (304 grade) construction on most reel models.

## Return Goods Policy

All Hannay reels are built to order. The parts and components are ordered or placed into production as soon as the order is written.

In order to keep the number of returned goods at a minimum, we ask that you use the Hannay Reels Spec Worksheet and/or Accessory Order Form when specifying reels with us.

**Be sure to include any size and/or weight limitations for your installation.**

In the event that an item does need to be returned for credit, repair or replacement, prior approval **must** be obtained from Hannay Reels, Inc. Upon your request, we will fax a Return Goods Authorization form. A signed copy of this form must accompany the material when returned to us.

All material must be returned prepaid, unless otherwise noted on our Return Goods Authorization. **No** return will be accepted that has been damaged due to improper return packaging, tampered with or altered from its original condition. **Equipment specially built to customer specifications and requirements is not subject to cancellation or returnable for credit under any conditions.**

Our restocking and handling fee is a MINIMUM of 25% for standard catalog reels and parts.

No material will be accepted for credit when returned without permission. Orders for equipment incorporating variations from catalog listed items are special and are not subject to return.

No allowance will be made for labor or mileage charges incurred in making exchanges, replacements or repairs.

## Hannay Reels **Spec Worksheet**

To specify Hannay reels, fill out this simple form and mail, fax or email it to your dealer.

Photocopy this page or download and print from [hannay.com](http://hannay.com)

### 1. Who is the reel for?

|                |         |          |         |
|----------------|---------|----------|---------|
| Contact        |         | Date / / |         |
| Company        |         | Position |         |
| Street Address |         |          |         |
| City           | State   | Zip      | Country |
| Phone ( )      | Fax ( ) | Email    |         |

### 2. What is the reel for?

☐ **HOSE** (check one): ☐ Storage only ☐ Live Single hose ☐ Live Dual hose

|                   |              |                   |                       |
|-------------------|--------------|-------------------|-----------------------|
| Inside diameter:  | Hose length: | Bend radius:      | Flat hose dimensions: |
| Outside diameter: | Hose weight: | Coupling spacing: |                       |

Type of product handled live application: (check one):

|                                         |                                    |                                                  |                                        |
|-----------------------------------------|------------------------------------|--------------------------------------------------|----------------------------------------|
| <input type="radio"/> Liquid (specify): | <input type="radio"/> Temperature: | <input type="radio"/> Oxygen/Acetylene:          | <input type="radio"/> Other (specify): |
| <input type="radio"/> Gases (specify):  | <input type="radio"/> Pressure:    | <input type="radio"/> Hydraulic fluid (specify): |                                        |

Fluid path type: (check one): ☐ Steel (standard) ☐ Aluminum ☐ Stainless Steel ☐ Other

Reel inlet type: (check one): ☐ Swivel joint 90° (standard) ☐ Straight

Reel outlet type (riser): Size:

|                     |                                                      |                                                      |                             |
|---------------------|------------------------------------------------------|------------------------------------------------------|-----------------------------|
| Thread (check one): | <input type="radio"/> National Pipe Thread (NPT)     | <input type="radio"/> Joint Industry Committee (JIC) | <input type="radio"/> Other |
|                     | <input type="radio"/> National Standard Thread (NST) | <input type="radio"/> British Standard Pipe (BSP)    |                             |

☐ **CABLE** (check one): ☐ Live\* ☐ Storage only

\*Number of conductors, or wire gauge, required:

\*Number of connectors: Cable weight: Cable length:

\*Voltage: Outside diameter:

\*Amperage (live application only): Bend radius:

Indicate your custom specifications

### 3. What features does the reel need? Check type of rewind:

☐ **MANUAL REWIND**

☐ Disc rewind (hand over hand) ☐ Gear-driven crank ☐ Direct crank (permanent or removable) ☐ Chain-driven crank

☐ **POWER REWIND**

☐ Spring ☐ Air ☐ Electric (voltage): ☐ Hydraulic

Type of installation (check one): ☐ Floor ☐ Wall ☐ Overhead ☐ Vehicle






Temperature Range: Environment:

Accessories (if any): Hose/Cable Stop: ☐ Yes ☐ No

Roller Assemblies:

Finish: ☐ Painted steel (standard) ☐ Aluminum ☐ Polished ☐ Unpolished ☐ Stainless steel ☐ Polished ☐ Unpolished

Check type of installation and roller position for spring reels:

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                      |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <input type="radio"/> Drag Position SR                                              | <input type="radio"/> Lift Position VR                                              | <input type="radio"/> Stretch (no roller) Position TR                               | <input type="radio"/> Wall Mount Position TR                                        | <input type="radio"/> Recovery (pick-up) (no roller)                                 |
|  |  |  |  |  |
| <input type="radio"/> Constant tension available on all roller positions            |                                                                                     |                                                                                     |                                                                                     |                                                                                      |

Indicate your custom specifications

### 4. Specifying Location of Components

Optional Location of Components:

Location of the inlet, outlet riser, and rewind mechanism can be varied to meet your requirements and **must be specified on your order**. Unless otherwise specified, most reels will be shipped as **Right Top Rewind** with the inlet, outlet riser, and rewind mechanism on the operator's right.



☐ **RT – Right Top Rewind**  
Standard – Always look at your reel from this position to determine right hand or left hand.



☐ **RB – Right Bottom Rewind**



☐ **LT – Left Top Rewind**



☐ **LB – Left Bottom Rewind**

Note: Use component location initials as suffix after model number (ie: E1520-17-18 LT)

### 5. Please note size and/or weight limitations for your installation

SPECIFICATIONS

Depth:

Height:

Width:

Weight:

**For custom applications not found in our catalogs, call the Inside Sales Group at 518-797-3791.**

# Hose Assemblies

Complete Reel Packages are also available.

For further information, refer to the Reel Packages Sheet at Hannay.com.

## Hose Assemblies

Allow us to quote the hose along with the reel to simplify your procurement process. Hannay inventories a wide variety of hose assemblies for common applications like general purpose air and water, petroleum products, hydraulics, oxygen/acetylene, breathing air, and rescue equipment. Special lengths, fittings, and custom application assemblies are usually available in 5 to 10 business days. Beside the I.D. and Length, be sure to know the Temperature Range, Fluid, Working Pressure, and Fitting Specifications for your hose.

### Low Pressure Hose

We stock a variety of low pressure hose assemblies in several sizes and lengths. We offer hose with EPDM cover and tube and brass fittings, which are excellent for air, water, and many agricultural chemicals. EPDM is recommended for outside usage due to its resistance to heat, sunlight, and weathering.

For shop use, we offer a hose with high oil resistant tube and cover. It is suitable for use with petroleum based hydraulic fluid, lubricating oil, anti-freeze, diesel fuel, water, and air and may be special ordered in several different colors. Hoses for specialty applications are available upon request.

### Medium and High Pressure Hose

Several different hydraulic and general purpose hose assemblies are offered to meet the specifications of your particular application. We stock an assortment of common sizes to be able meet your needs with a minimum delivery time.

### Twin Hydraulic Hose

Hannay Reels offers bonded hydraulic hose that helps solve problems associated with unwinding and storing multiple lines. Various options are available not only for hydraulic fluid, but a wide variety of chemicals, agricultural sprays, urethane foam mixers, and fire resistant fluids.

### Twin Oxygen/Acetylene Hose

We stock Grade R and Grade T twin hose assemblies in 1/4" and 3/8" in lengths of 50', 75', and 100' which will cover most requirements for oxygen/acetylene, as well as propane and MAPP. For oxygen/acetylene reels, see the Hannay Welding Reels Catalog H-0408-W.

**Note:** All spring rewind reels complete with hose are supplied with appropriate hose stop. (See Ordering & Accessory Guide.)

#### Mounting Hole Sizes

|                                                     |                                                   |
|-----------------------------------------------------|---------------------------------------------------|
| <b>N Series Reels</b>                               | 7/16" wide x 7/8" long slot running front to back |
| <b>Pressed Frame Reels and Channel Framed Reels</b> | 7/16" wide x 7/8" long slot running left to right |
| <b>Series 1000</b>                                  | 5/16" wide x 7/8" long slot                       |
| <b>Series 1500, 1800, 2000, 4000</b>                | 13/32" round holes                                |

# Series AG | With Patented Air Speed Control Governor

### To handle 1/4" through 1-1/2" I.D. hose.

Most Hannay spring reel models are available with an air governor rewind assist, which prevents the hose from winding back onto the reel too quickly. Speed is regulated by restricting air flow through an air governor attached to the rewind mechanism. The result is smooth, controlled rewind speed each and every time.

Unlike other speed control mechanisms designed for spring rewind reels, there are 3 major advantages to the Hannay design:

- 1. Highly scalable** – The air speed control governor can be scaled up to regulate speed on even the most powerful spring reels we offer. Other designs can only work on light-duty springs.
- 2. Operates in all climates** – Because the AG Series uses air flow to control speed (not hydraulic fluid, which can change viscosity depending on temperature), the reel's rewind speed is controlled and unaffected, even by cold weather.
- 3. Fully adjustable** – The end-user can turn the air restrictor clockwise or counterclockwise until the optimal rewind speed is found for the application.

For further information (other than dimensions) on any of the AG Series reels listed below, please go to the following pages in this catalog:

- AG600 Series: Go to page 11 (Series 600)
- AG700 Series: Go to page 13 (Series 700)
- AG800 Series: Go to page 15 (Series 800)
- AG900 Series: Go to page 16 (Series 900)



AG800 Series shown

## With Patented Air Speed Control Governor | Series AG

| Model Number      | Hose Capacity of Reel<br>feet m |              |               |              |              |              |               |              | Approx. Weight<br>lb. kg |           | Std. Roller Assy. | Reel Dimensions***<br>in. mm |           |             |              |              |              |              |             |             |              |
|-------------------|---------------------------------|--------------|---------------|--------------|--------------|--------------|---------------|--------------|--------------------------|-----------|-------------------|------------------------------|-----------|-------------|--------------|--------------|--------------|--------------|-------------|-------------|--------------|
|                   | I.D. in.<br>mm                  | 1/4<br>6     | 3/8<br>10     | 1/2<br>13    | 3/4<br>19    | 1<br>25      | 1-1/4<br>32   | 1-1/2<br>38  |                          |           |                   | A                            | B         | C           | D            | E            | F            | G            | H           | X           | Y            |
|                   | O.D. in.<br>mm                  | 5/8<br>16    | 3/4<br>19     | 7/8<br>22    | 1-9/32<br>33 | 1-9/16<br>40 | 1-13/16<br>46 | 2-1/16<br>52 | NET                      | SHIP      |                   |                              |           |             |              |              |              |              |             |             |              |
| AG615-23-24-10.5B | 2/65<br>2/20                    | 2/60<br>2/18 | 2/30<br>2/9   | -            | -            | -            | -             | -            | 117<br>53                | 152<br>69 | AG303             | 9.25<br>235                  | 3<br>76   | 10.5<br>267 | 23.25<br>591 | 25.25<br>641 | 15.75<br>400 | 23.88<br>607 | 12.5<br>318 | 4.5<br>114  | 20<br>508    |
| AG617-25-26-15.5B | 2/75<br>2/23                    | 2/75<br>2/23 | 2/50<br>2/15  | -            | -            | -            | -             | -            | 118<br>54                | 153<br>69 | AG305             | 11.25<br>286                 | 5<br>127  | 15.5<br>394 | 25<br>635    | 27<br>686    | 17.75<br>451 | 25.88<br>657 | 13.5<br>343 | 6.5<br>165  | 21.75<br>552 |
| AG617-25-26-15.5A | 2/100<br>2/30                   | 2/85<br>2/26 | -             | -            | -            | -            | -             | -            | 145<br>66                | 180<br>82 | AG305             | 11.25<br>286                 | 5<br>127  | 15.5<br>394 | 25<br>635    | 27<br>686    | 18.50<br>470 | 25.88<br>657 | 13.5<br>343 | 6.5<br>165  | 21.75<br>552 |
| AG618-30-31-15.5A | -                               | -            | 2/100<br>2/30 | 2/50<br>2/15 | -            | -            | -             | -            | 155<br>70                | 190<br>86 | AG306             | 12.25<br>311                 | 6<br>153  | 15.5<br>394 | 28.5<br>724  | 30.5<br>775  | 19.50<br>495 | 31.38<br>797 | 17<br>432   | 7.5<br>190  | 25.25<br>641 |
| AG716-19-20-10.5J | -                               | 50<br>15     | 50<br>15      | -            | -            | -            | -             | -            | 101<br>46                | 136<br>62 | AG304             | 10.25<br>260                 | 4<br>102  | 10.5<br>267 | 18<br>457    | 20<br>508    | 14.75<br>375 | 19.75<br>502 | 10.5<br>267 | 5.5<br>139  | 14.75<br>375 |
| AG716-23-24-15.5J | -                               | 65<br>20     | 65<br>20      | -            | -            | -            | -             | -            | 111<br>50                | 146<br>66 | AG304             | 10.25<br>260                 | 4<br>102  | 15.5<br>394 | 23.25<br>591 | 25.25<br>641 | 14.75<br>375 | 23.88<br>607 | 12.5<br>318 | 5.5<br>139  | 20<br>508    |
| AG716-25-26-15.5B | -                               | 75<br>23     | 75<br>23      | -            | -            | -            | -             | -            | 115<br>52                | 150<br>68 | AG304             | 10.25<br>260                 | 4<br>102  | 15.5<br>394 | 25<br>635    | 27<br>686    | 14<br>356    | 25.88<br>657 | 13.5<br>343 | 5.5<br>139  | 21.75<br>552 |
| AG718-25-26-15.5G | -                               | 100<br>30    | 100<br>30     | -            | -            | -            | -             | -            | 121<br>55                | 156<br>71 | AG306             | 12.25<br>311                 | 6<br>152  | 15.5<br>394 | 25<br>635    | 27<br>686    | 16<br>406    | 25.88<br>657 | 13.5<br>343 | 7.5<br>190  | 21.75<br>552 |
| AG718-30-31-20D   | -                               | 150<br>46    | 125<br>38     | -            | -            | -            | -             | -            | 152<br>69                | 187<br>85 | AG306             | 12.25<br>311                 | 6<br>152  | 20<br>508   | 28.5<br>724  | 30.5<br>775  | 16.75<br>425 | 31.38<br>797 | 17<br>432   | 7.5<br>190  | 25.25<br>641 |
| AG818-23-24-10.5J | -                               | -            | -             | 50<br>15     | 25<br>8      | -            | -             | -            | 110<br>50                | 145<br>66 | AG306             | 12.25<br>311                 | 6<br>152  | 10.5<br>267 | 23.25<br>591 | 25.25<br>641 | 16.75<br>425 | 23.88<br>607 | 12.5<br>318 | 7.5<br>190  | 20<br>508    |
| AG816-25-26-10.5B | -                               | -            | -             | 60<br>18     | 35<br>11     | -            | -             | -            | 121<br>55                | 156<br>71 | AG304             | 10.25<br>260                 | 4<br>102  | 10.5<br>267 | 25<br>635    | 27<br>686    | 14.75<br>375 | 25.88<br>657 | 13.5<br>343 | 5.5<br>140  | 21.75<br>552 |
| AG818-25-26-10.5B | -                               | -            | -             | 70<br>21     | 50<br>15     | -            | -             | -            | 127<br>58                | 162<br>73 | AG306             | 12.25<br>311                 | 6<br>152  | 10.5<br>267 | 25<br>635    | 27<br>686    | 16.75<br>425 | 25.88<br>657 | 13.5<br>343 | 7.5<br>190  | 21.75<br>552 |
| AG820-25-26-10.5A | -                               | -            | -             | 85<br>26     | 75<br>23     | -            | -             | -            | 156<br>71                | 191<br>87 | AG308             | 14.25<br>362                 | 8<br>204  | 10.5<br>267 | 25<br>635    | 27<br>686    | 19.5<br>495  | 25.88<br>657 | 13.5<br>343 | 9.5<br>241  | 21.75<br>552 |
| AG820-30-31-10.5A | -                               | -            | -             | -            | 100<br>30    | -            | -             | -            | 162<br>73                | 197<br>89 | AG308             | 14.25<br>362                 | 8<br>204  | 10.5<br>267 | 28.5<br>724  | 30.5<br>775  | 19.5<br>495  | 31.38<br>797 | 17<br>432   | 9.5<br>241  | 25.25<br>641 |
| AG820-30-31-15.5A | -                               | -            | -             | 100<br>30    | -            | -            | -             | -            | 170<br>77                | 205<br>93 | AG308             | 14.25<br>362                 | 8<br>204  | 15.5<br>394 | 28.5<br>724  | 30.5<br>775  | 19.5<br>495  | 31.38<br>797 | 17<br>432   | 9.5<br>241  | 25.25<br>641 |
| AG920-25-26A      | -                               | -            | -             | -            | -            | 50<br>15     | 40<br>12      | 152<br>69    | 187<br>85                |           | AG308             | 14.25<br>362                 | 8<br>204  | 10.5<br>267 | 25<br>635    | 27<br>686    | 24<br>610    | 25.88<br>657 | 13.5<br>343 | 9.5<br>241  | 21.75<br>552 |
| AG922-30-31A      | -                               | -            | -             | -            | -            | 75<br>23     | 50<br>15      | 181<br>82    | 216<br>98                |           | AG310             | 16.25<br>413                 | 10<br>254 | 10.5<br>267 | 28.5<br>724  | 30.5<br>775  | 26<br>660    | 31.38<br>797 | 17<br>432   | 11.5<br>292 | 25.25<br>641 |

### Notes:

A hose stop is necessary to keep spring from unwinding.

- Specifications subject to change.
- Reel models and capacities shown are for standard drag applications; for vertical lift applications, consult factory.

3. Other sizes, from standard components, available on request.

4. Finish: Refer to page 3.

5. Be sure to check dimensions and weights prior to ordering.

NOTICE: A flexible connector must be used between the inlet pipe and the inlet swivel joint.

\*\*\* X, Y indicate mounting holes. See page 5.

### Available Roller Positions



SR (STD)




VR (OPT)



TR (OPT)



TR (Wallmount)

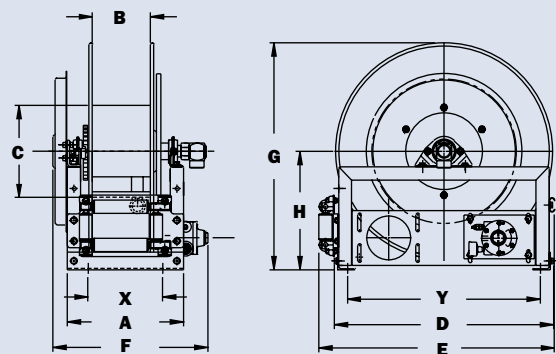

AG800 shown

## Series N400

• Gas Welding

### To handle twin 1/4" or 3/8" I.D. welding hose.

- Heavy-duty spring motor.
- Non-sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlets: 90° ball bearing swivel joints, 1/2" female NPT threads.
- Standard outlets: male 9/16"-18 threads, right-hand for oxygen, left-hand for gas.
- Pressures to 300 psi (21 bar).
- Temperatures from -40°F to +200°F (-40°C to +93°C).
- Type of gas used must be specified.
- 4-way roller assembly.
- Hose stop is required.



Standard configuration shown

### PARTS DRAWING – ISO 186

| Model Number     | Hose Capacity of Reel<br>feet m |               |           | Approx. Weight<br>lb. kg |      | Standard Roller Assy. | Reel Dimensions***<br>in. mm |             |              |              |             |              |          |   |
|------------------|---------------------------------|---------------|-----------|--------------------------|------|-----------------------|------------------------------|-------------|--------------|--------------|-------------|--------------|----------|---|
|                  | I.D. in.<br>mm                  | 1/4<br>6      | 3/8<br>9  | NET                      | SHIP |                       | A                            | B           | C            | E            | F           | G            | H        | X |
|                  | O.D. in.<br>mm                  | .53<br>13     | .66<br>17 |                          |      |                       |                              |             |              |              |             |              |          |   |
| N416-17-18-8L    | 2/50<br>2/15                    | –<br>–        | 64<br>29  | 71*<br>32                | N204 | 10<br>254             | 4<br>102                     | 8<br>203    | 19.5<br>495  | 15.12<br>368 | 17.5<br>445 | 9.13<br>232  | 8<br>203 |   |
| N416-19-20-8L    | –<br>2/15                       | 2/50<br>2/15  | 68<br>31  | 75*<br>34                | N204 | 10<br>254             | 4<br>102                     | 8<br>203    | 20.75<br>527 | 15.12<br>368 | 20<br>508   | 10.62<br>270 | 8<br>203 |   |
| N416-19-20-10.5C | 2/25<br>2/8                     | 2/25<br>2/8   | 70<br>32  | 77*<br>35                | N204 | 10<br>254             | 4<br>102                     | 10.5<br>267 | 20.75<br>527 | 15.12<br>368 | 20<br>508   | 10.62<br>270 | 8<br>203 |   |
| N416-19-20-8J    | 2/50<br>2/15                    | 2/50<br>2/15  | 74<br>34  | 83*<br>38                | N204 | 10<br>254             | 4<br>102                     | 8<br>203    | 20.75<br>527 | 15.12<br>368 | 20<br>508   | 10.62<br>270 | 8<br>203 |   |
| N416-23-24-10.5G | 2/75<br>2/23                    | 2/75<br>2/23  | 94<br>43  | 112*<br>51               | N204 | 10<br>254             | 4<br>102                     | 10.5<br>267 | 23.75<br>603 | 15.12<br>368 | 24<br>610   | 12.62<br>320 | 8<br>203 |   |
| N417-23-24-15.5G | 2/100<br>2/30                   | –<br>–        | 95<br>43  | 115*<br>52               | N205 | 11<br>279             | 5<br>127                     | 15.5<br>394 | 23.75<br>603 | 16.12<br>394 | 24<br>610   | 12.62<br>320 | 9<br>229 |   |
| N417-25-26-10.5G | –<br>–                          | 2/100<br>2/30 | 97<br>44  | 132<br>60                | N205 | 11<br>279             | 5<br>127                     | 10.5<br>267 | 25.75<br>641 | 16.12<br>394 | 26<br>660   | 13.62<br>346 | 9<br>229 |   |

#### Notes:

A hose stop is necessary to keep spring from unwinding.

1. Specifications subject to change.
2. Reel models and capacities shown are for standard drag applications; for vertical lift applications, consult factory.
3. Other sizes, from standard components, available on request.
4. **Finish:** Refer to page 3.

5. Be sure to check dimensions and weights prior to ordering.

**NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.

\* When shipped as a parcel package (via FedEx or UPS Ground), joints loose. Net weight plus carton weight.

\*\*\* X, Y indicate mounting holes. See page 5.

#### Available Roller Positions



SR (STD)





VR (OPT)



TR (OPT)



TR (Wallmount)

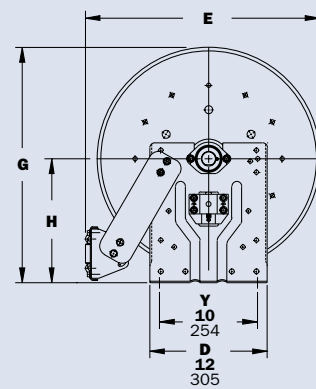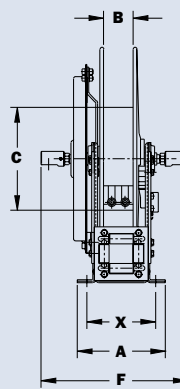



## High Pressure | Series N500

• Chassis Grease • Hydraulics • Air/Water

### To handle single 1/4" or 3/8" I.D. hose.

- Compact frame and narrow base.
- Non-sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlet: 90° swivel joint, 1/4" female NPT threads.  
3/8" female NPT threads are optional and **must be specified**.
- Standard outlet: 1/4" female NPT threads.  
3/8" female NPT threads are optional and **must be specified**.
- Other threads can be furnished and **must be specified**.
- Standard 1/4" pressure and temperature:  
10,000 psi (690 bar), -40°F to +250°F (-40°C to +121°C).
- Standard 3/8" pressure and temperature:  
3000 psi (207 bar), -40°F to +250°F (-40°C to +121°C).
- Optional 3/8" pressure: 8000 psi (552 bar) – must specify.
- 4-way roller assembly.
- SR and VR roller positions: swivel joint is standard on the right.  
TR roller positions: swivel joint is standard on the left.  
Other configurations available, must specify.
- Constant tension is available – consult factory.



Standard configuration shown with optional full-flow swivel joint



### Optional Swivel Mounting Bracket

Part No. 9908.9990.

For N-Series spring retractable reels, available as a kit. Conditions apply, consult factory.

### PARTS DRAWING – ISO 92

| Model Number     | Hose Capacity of Reel<br>feet m |           |           | Approx. Weight<br>lb. kg |                              |                        | Standard Roller Assy. | Reel Dimensions***<br>in. mm |              |              |              |
|------------------|---------------------------------|-----------|-----------|--------------------------|------------------------------|------------------------|-----------------------|------------------------------|--------------|--------------|--------------|
|                  | I.D. in.<br>mm                  | 1/4<br>6  | 3/8<br>10 | NET                      | UPS/<br>FedEx<br>SHIP<br>Wt. | Freight<br>SHIP<br>Wt. |                       | C                            | E            | G            | H            |
|                  | O.D. in.<br>mm                  | 5/8<br>16 | 3/4<br>19 |                          |                              |                        |                       |                              |              |              |              |
| N515-14-16-8L    |                                 | 25<br>8   | 25<br>8   | 48<br>22                 | 64*<br>29                    | 83<br>38               | N203                  | 8<br>203                     | 17.62<br>448 | 16.25<br>413 | 9.12<br>232  |
| N515-16-17-10.5C |                                 | 35<br>11  | 35<br>11  | 51<br>23                 | 67*<br>30                    | 86<br>39               | N203                  | 10.5<br>267                  | 18.5<br>470  | 17<br>432    | 9.12<br>232  |
| N515-19-20-10.5J |                                 | 50<br>15  | 50<br>15  | 63<br>29                 | 81*<br>37                    | 98<br>44               | N203                  | 10.5<br>267                  | 20.75<br>527 | 20<br>508    | 10.62<br>270 |
| N515-23-24-15.5J |                                 | 75<br>23  | 65<br>20  | 75<br>34                 | 92*<br>42                    | 110<br>50              | N203                  | 15.5<br>394                  | 23.75<br>603 | 24<br>610    | 12.62<br>321 |

#### Notes:

**A hose stop is necessary to keep spring from unwinding.**

1. Specifications subject to change.
2. Reel models and capacities shown are for standard drag applications; for vertical lift applications, consult factory.
3. Other sizes, from standard components, available on request.
4. **Finish:** Refer to page 3.

**5. Be sure to check dimensions and weights prior to ordering.**

**NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.

\* Dimensional weight may apply when shipped as a parcel package (via FedEx or UPS Ground).

\*\*\* X, Y indicate mounting holes. See page 5.

#### Available Roller Positions



SR (STD)





VR (OPT)



TR (OPT)



TR (Wallmount)

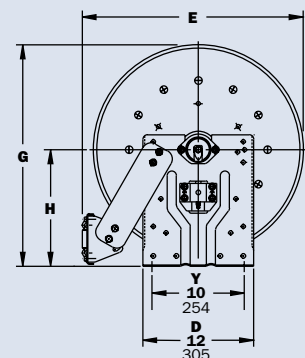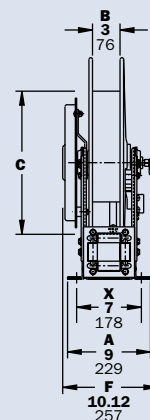

## Series N600 | Dual Hose

• Hydraulics • Spray Painting • Air/Water

### To handle dual 1/4" through 1/2" I.D. hose.

- Narrow frame and compact mounting base.
- Non-sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlets: 90° balanced pressure swivel joints, 1/2" female NPT threads.
- Standard outlets: 1/2" female NPT threads.
- Standard pressures to 3000 psi (207 bar), available up to 10,000 psi (690 bar) – must specify.
- Temperatures from -60°F to +250°F (-51°C to +121°C), optional temperatures to +400°F (+204°C) – must specify.
- 4-way roller assembly.
- Constant tension is available – consult factory.
- Reels for use with oxygen/acetylene. See Series N400 on page 8.
- Optional full flow swivel joint is available upon request. Add 1-3/4" to "F" dimension.



Standard configuration shown

### PARTS DRAWING – ISO 80

| Model<br>Number  | Hose Capacity of Reel<br>feet m |           |           |           | Approx. Weight<br>lb. kg |                              |                        | Standard<br>Roller<br>Assy. | Reel Dimensions***<br>in. mm |     |      |       |       |     |       |     |
|------------------|---------------------------------|-----------|-----------|-----------|--------------------------|------------------------------|------------------------|-----------------------------|------------------------------|-----|------|-------|-------|-----|-------|-----|
|                  | I.D. in.<br>mm                  | 1/4<br>6  | 3/8<br>10 | 1/2<br>13 | NET                      | UPS/<br>FedEx<br>SHIP<br>Wt. | Freight<br>SHIP<br>Wt. |                             | A                            | B   | C    | E     | F     | G   | H     | X   |
|                  | O.D. in.<br>mm                  | 5/8<br>16 | 3/4<br>19 | 7/8<br>22 |                          |                              |                        |                             |                              |     |      |       |       |     |       |     |
| N615-19-20-10.5C |                                 | 2/35      | 2/35      | 2/20      | 63                       | 74*                          | 98                     | N203                        | 9                            | 3   | 10.5 | 20.75 | 11.75 | 20  | 10.62 | 7   |
|                  |                                 | 2/11      | 2/11      | 2/6       | 29                       | 34                           | 44                     |                             | 229                          | 76  | 267  | 527   | 298   | 508 | 270   | 178 |
| N617-19-20-10.5J |                                 | 2/50      | 2/50      | 2/25      | 66                       | 84*                          | 101                    | N205                        | 11                           | 5   | 10.5 | 20.75 | 13.75 | 20  | 10.62 | 9   |
|                  |                                 | 2/15      | 2/15      | 2/8       | 30                       | 38                           | 46                     |                             | 279                          | 127 | 267  | 527   | 349   | 508 | 270   | 229 |
| N615-23-24-10.5B |                                 | 2/65      | 2/60      | 2/30      | 87                       | 104*                         | 122                    | N203                        | 9                            | 3   | 10.5 | 23.75 | 11.75 | 24  | 12.62 | 7   |
|                  |                                 | 2/20      | 2/18      | 2/9       | 40                       | 47                           | 55                     |                             | 229                          | 76  | 267  | 603   | 298   | 610 | 321   | 178 |
| N617-25-26-15.5B |                                 | 2/75      | 2/75      | 2/50      | 93                       | —                            | 128                    | N205                        | 11                           | 5   | 15.5 | 25.25 | 13.75 | 26  | 13.62 | 9   |
|                  |                                 | 2/23      | 2/23      | 2/15      | 42                       | —                            | 58                     |                             | 279                          | 127 | 394  | 641   | 349   | 660 | 346   | 229 |
| N617-25-26-15.5A |                                 | 2/100     | 2/85      | —         | 120                      | —                            | 155                    | N205                        | 11                           | 5   | 15.5 | 25.25 | 14.5  | 26  | 13.62 | 9   |
|                  |                                 | 2/31      | 2/26      | —         | 54                       | —                            | 70                     |                             | 279                          | 127 | 394  | 641   | 368   | 660 | 346   | 229 |

#### Notes:

A hose stop is necessary to keep spring from unwinding.

- Specifications subject to change.
- Reel models and capacities shown are for standard drag applications; for vertical lift applications, consult factory.
- Other sizes, from standard components, available on request.
- Finish: Refer to page 3.

5. Be sure to check dimensions and weights prior to ordering.

**NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.

\*Dimensional weight may apply when shipped as a parcel package (via FedEx or UPS Ground).

\*\*\* X, Y indicate mounting holes. See page 5.

**For hydraulic tool circuit applications, full flow swivels with Viton® seals are recommended (add 2.25 to "F" dimension in chart).**

#### Available Roller Positions



SR (STD)





VR (OPT)



TR (OPT)



TR (Wallmount)

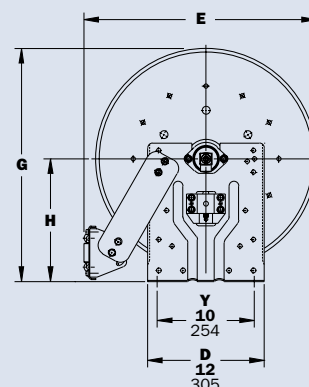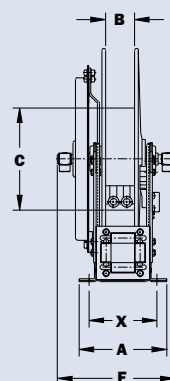

Dual  
Hose

# Series 600

• Hydraulics • Spray Painting • Air/Water

## To handle dual 1/4" through 3/4" I.D. hose.

- Rollformed channel frame for heavy-duty applications.
- Non-sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlets: 90° balanced pressure swivel joints, 1/2" female NPT threads (1" inlet available).
- Standard outlets: 1/2" female NPT threads (3/4" outlet available).
- Standard pressures to 3000 psi (207 bar), available up to 10,000 psi (690 bar) – must specify.
- Temperatures from -60°F to +250°F (-51°C to +121°C), optional temperatures to +400°F (+204°C) – must specify.
- 4-way roller assembly.
- Constant tension is available – consult factory.
- Reels for use with oxygen/acetylene. See Series N400 on page 8.
- Optional full flow swivel joint is available upon request. Add 1-3/4" to "F" dimension.



Standard configuration shown

## PARTS DRAWING – ISO 8

| Model Number     | Hose Capacity of Reel<br>feet m |           |           |           |              | Approx.<br>Weight<br>lb. kg |      | Standard<br>Roller<br>Assy. | Reel Dimensions***<br>in. mm |     |      |       |       |       |       |      |     |       |
|------------------|---------------------------------|-----------|-----------|-----------|--------------|-----------------------------|------|-----------------------------|------------------------------|-----|------|-------|-------|-------|-------|------|-----|-------|
|                  | I.D. in.<br>mm                  | 1/4<br>6  | 3/8<br>10 | 1/2<br>13 | 3/4<br>19    | NET                         | SHIP |                             | A                            | B   | C    | D     | E     | F     | G     | H    | X   | Y     |
|                  | O.D. in.<br>mm                  | 5/8<br>16 | 3/4<br>19 | 7/8<br>22 | 1-9/32<br>33 |                             |      |                             | A                            | B   | C    | D     | E     | F     | G     | H    | X   | Y     |
| 615-23-24-10.5B  | 2/65                            | 2/60      | 2/30      | –         |              | 53                          | 88   | R203                        | 8.25                         | 3   | 10.5 | 23.25 | 24.38 | 13    | 23.88 | 12.5 | 3.5 | 20    |
|                  | 2/20                            | 2/18      | 2/9       | –         |              | 24                          | 40   |                             | 210                          | 76  | 267  | 591   | 619   | 330   | 607   | 318  | 89  | 508   |
| 617-25-26-15.5B  | 2/75                            | 2/75      | 2/50      | –         |              | 93                          | 128  | R205                        | 10.25                        | 5   | 15.5 | 25    | 26.12 | 15    | 25.88 | 13   | 5.5 | 21.75 |
|                  | 2/23                            | 2/23      | 2/15      | –         |              | 42                          | 58   |                             | 260                          | 127 | 394  | 635   | 663   | 381   | 657   | 343  | 140 | 552   |
| 617-25-26-15.5A  | 2/100                           | 2/85      | –         | –         |              | 120                         | 155  | R205                        | 10.25                        | 5   | 15.5 | 25    | 26.12 | 15.75 | 25.88 | 13.5 | 5.5 | 21.75 |
|                  | 2/31                            | 2/26      | –         | –         |              | 54                          | 70   |                             | 260                          | 127 | 394  | 635   | 663   | 400   | 657   | 343  | 140 | 552   |
| †618-30-31-15.5A | –                               | –         | 2/100     | 2/50      |              | 130                         | 165  | R206                        | 11.25                        | 6   | 15.5 | 28.5  | 29.62 | 16.75 | 31.88 | 17   | 6.5 | 25.25 |
|                  | –                               | –         | 2/31      | 2/15      |              | 59                          | 75   |                             | 286                          | 152 | 394  | 724   | 752   | 425   | 797   | 432  | 165 | 641   |

### Notes:

**A hose stop is necessary to keep spring from unwinding.**

1. Specifications subject to change.
2. Reel models and capacities shown are for standard drag applications; for vertical lift applications, consult factory.
3. Other sizes, from standard components, available on request.
4. Finish: Refer to page 3.


5. Be sure to check dimensions and weights prior to ordering.

**NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.

\*\*\*X, Y indicate mounting holes. See page 5.

† Must specify if 1" joints and 3/4" outlet risers are required.

**For hydraulic tool circuit applications, full flow swivels with Viton® seals are recommended (add 2.25 to "F" dimension in chart).**

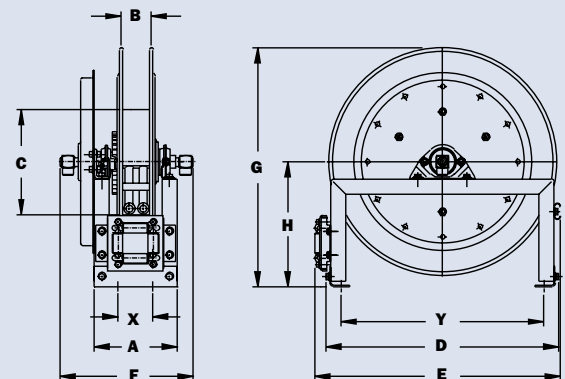

### Available Roller Positions



SR (STD)



VR (OPT)



TR (OPT)



TR (Wallmount)

## Series N700

- Lubrication • Air/Water • Assembly Operations
- Washdown • Air Tools • General Industrial Applications

### To handle 1/4" through 1/2" I.D. hose.

- Narrow frame and compact mounting base.
- Non-sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlet: 90° balanced pressure swivel joint, 1/2" female NPT threads.
- Standard outlet: 1/2" female NPT threads.
- Standard pressures to 3000 psi (207 bar), available up to 10,000 psi (690 bar) – must specify.
- Temperatures from -60°F to +250°F (-51°C to +121°C), optional temperatures to +400°F (+204°C) – must specify.
- 4-way roller assembly.
- SR and VR roller positions: swivel joint is standard on the right. TR roller positions: swivel joint is standard on the left. Other configurations available, must specify.
- Constant tension is available – consult factory.



Standard configuration shown



### Optional Swivel Mounting Bracket

Part No. 9908.9990. For N-Series spring retractable reels, available as a kit. Conditions apply, consult factory.

### PARTS DRAWING – ISO 79

| Model Number     | Hose Capacity of Reel<br>feet m |           |           |           | Approx. Weight<br>lb. kg |                              |                        | Standard Roller Assy. | Reel Dimensions***<br>in. mm |      |       |       |       |       |     |   |
|------------------|---------------------------------|-----------|-----------|-----------|--------------------------|------------------------------|------------------------|-----------------------|------------------------------|------|-------|-------|-------|-------|-----|---|
|                  | I.D. in.<br>mm                  | 1/4<br>6  | 3/8<br>10 | 1/2<br>13 | NET                      | UPS/<br>FedEx<br>SHIP<br>Wt. | Freight<br>SHIP<br>Wt. |                       | A                            | B    | C     | E     | F     | G     | H   | X |
|                  | O.D. in.<br>mm                  | 5/8<br>16 | 3/4<br>19 | 7/8<br>22 |                          |                              |                        |                       |                              |      |       |       |       |       |     |   |
| N716-14-16-8C    | –                               | 25        | 25        | 52        | 64*                      | 87                           | N204                   | 10                    | 4                            | 8    | 17.62 | 11.25 | 16.25 | 9.12  | 8   |   |
|                  | –                               | 8         | 8         | 24        | 29                       | 39                           |                        | 254                   | 102                          | 203  | 448   | 286   | 413   | 232   | 203 |   |
| N716-16-17-10.5C | –                               | 35        | 35        | 55        | 67*                      | 90                           | N204                   | 10                    | 4                            | 10.5 | 18.5  | 11.25 | 17    | 9.12  | 8   |   |
|                  | –                               | 11        | 11        | 25        | 30                       | 41                           |                        | 254                   | 102                          | 267  | 470   | 286   | 432   | 232   | 203 |   |
| †N716-17-18-8L   | –                               | 50†       | 50†       | 55        | 67*                      | 90                           | N204                   | 10                    | 4                            | 8    | 19.5  | 11.25 | 17.5  | 9.12  | 8   |   |
|                  | –                               | 15†       | 15†       | 25        | 30                       | 41                           |                        | 254                   | 102                          | 203  | 495   | 286   | 445   | 232   | 203 |   |
| N716-19-20-10.5J | –                               | 50        | 50        | 64        | 82*                      | 99                           | N204                   | 10                    | 4                            | 10.5 | 20.75 | 11.25 | 20    | 10.62 | 8   |   |
|                  | –                               | 15        | 15        | 29        | 37                       | 45                           |                        | 254                   | 102                          | 267  | 527   | 286   | 508   | 270   | 203 |   |
| N716-23-24-15.5J | –                               | 65        | 65        | 79        | 92*                      | 114                          | N204                   | 10                    | 4                            | 15.5 | 23.75 | 11.25 | 24    | 12.62 | 8   |   |
|                  | –                               | 20        | 20        | 36        | 42                       | 52                           |                        | 254                   | 102                          | 394  | 603   | 286   | 610   | 321   | 203 |   |
| N716-23-24-15.5G | 100                             | 75        | 65        | 94        | 101*                     | 129                          | N204                   | 10                    | 4                            | 15.5 | 23.75 | 11.25 | 24    | 12.62 | 8   |   |
|                  | 30                              | 23        | 20        | 43        | 46                       | 59                           |                        | 254                   | 102                          | 394  | 603   | 286   | 610   | 321   | 203 |   |
| N716-25-26-15.5B | –                               | 75        | 75        | 90        | –                        | 125                          | N204                   | 10                    | 4                            | 15.5 | 25.25 | 11.25 | 26    | 13.62 | 8   |   |
|                  | –                               | 23        | 23        | 41        | –                        | 57                           |                        | 254                   | 102                          | 394  | 641   | 286   | 660   | 346   | 203 |   |
| N718-25-26-15.5G | –                               | 100       | 100       | 96        | –                        | 131                          | N206                   | 12                    | 6                            | 15.5 | 25.25 | 13.25 | 26    | 13.62 | 10  |   |
|                  | –                               | 30        | 30        | 44        | –                        | 59                           |                        | 305                   | 152                          | 394  | 641   | 337   | 660   | 346   | 254 |   |

#### Notes:

A hose stop is necessary to keep spring from unwinding.

- Specifications subject to change.
- Reel models and capacities shown are for standard drag applications; for vertical lift applications, consult factory.
- Other sizes, from standard components, available on request.
- Finish: Refer to page 3.

5. Be sure to check dimensions and weights prior to ordering.

NOTICE: A flexible connector must be used between the inlet pipe and the inlet swivel joint.

\*Dimensional weight may apply when shipped as a parcel package (via FedEx or UPS Ground).

\*\*\*X, Y indicate mounting holes. See page 5.

†Capacity based on low pressure air hose only. Not for vertical lift applications.

#### Available Roller Positions



SR (STD)




VR (OPT)



TR (OPT)



TR (Wallmount)

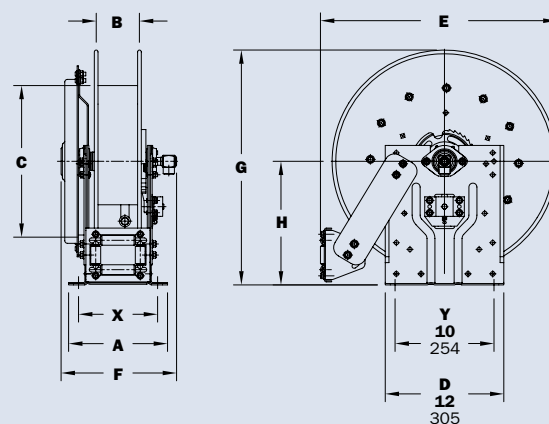



# Series 700

- Lubrication • Air/Water • Assembly Operations
- Washdown • Air Tools • General Industrial Applications

## To handle 1/4" through 1/2" I.D. hose.

- Rollformed channel frame for heavy-duty applications.
- Non-sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlet: 90° balanced pressure swivel joint, 1/2" female NPT threads.
- Standard outlet: 1/2" female NPT threads.
- Standard pressures to 3000 psi (207 bar), available up to 10,000 psi (690 bar) – must specify.
- Temperatures from -60°F to +250°F (-51°C to +121°C), optional temperatures to +400°F (+204°C) – must specify.
- 4-way roller assembly.
- SR and VR roller positions: swivel joint is standard on the right. TR roller positions: swivel joint is standard on the left. Other configurations available, must specify.
- Constant tension is available – consult factory.



Standard configuration shown

## PARTS DRAWING – ISO 66

| Model Number    | Hose Capacity of Reel<br>feet m |           |           |           | Approx. Weight<br>lb. kg |                              |                        | Standard Roller Assy. | Reel Dimensions***<br>in. mm |      |       |       |       |       |      |     |       |   |
|-----------------|---------------------------------|-----------|-----------|-----------|--------------------------|------------------------------|------------------------|-----------------------|------------------------------|------|-------|-------|-------|-------|------|-----|-------|---|
|                 | I.D. in.<br>mm                  | 1/4<br>6  | 3/8<br>10 | 1/2<br>13 | NET                      | UPS/<br>FedEx<br>SHIP<br>Wt. | Freight<br>SHIP<br>Wt. |                       | A                            | B    | C     | D     | E     | F     | G    | H   | X     | Y |
|                 | O.D. in.<br>mm                  | 5/8<br>16 | 3/4<br>19 | 7/8<br>22 |                          |                              |                        |                       |                              |      |       |       |       |       |      |     |       |   |
| 716-23-24-15.5J | –                               | 65        | 65        | 79        | 86*                      | 114                          | R204                   | 9.25                  | 4                            | 15.5 | 23.25 | 24.38 | 12.75 | 23.88 | 12.5 | 4.5 | 20    |   |
|                 | –                               | 20        | 20        | 36        | 39                       | 52                           |                        | 235                   | 102                          | 394  | 591   | 619   | 324   | 607   | 318  | 114 | 508   |   |
| 716-23-24-15.5G | 100                             | 75        | 65        | 94        | 102*                     | 129                          | R204                   | 9.25                  | 4                            | 15.5 | 23.25 | 24.38 | 12.75 | 23.88 | 12.5 | 4.5 | 20    |   |
|                 | 30                              | 23        | 20        | 43        | 46                       | 59                           |                        | 235                   | 102                          | 394  | 591   | 619   | 324   | 607   | 318  | 114 | 508   |   |
| 716-25-26-15.5B | –                               | 75        | 75        | 90        | –                        | 125                          | R204                   | 9.25                  | 4                            | 15.5 | 25    | 26.12 | 12.75 | 25.88 | 13.5 | 4.5 | 21.75 |   |
|                 | –                               | 23        | 23        | 41        | –                        | 57                           |                        | 235                   | 102                          | 394  | 635   | 663   | 324   | 657   | 343  | 114 | 552   |   |
| 718-25-26-15.5G | –                               | 100       | 100       | 96        | –                        | 131                          | R206                   | 11.25                 | 6                            | 15.5 | 25    | 26.12 | 14.75 | 25.88 | 13.5 | 6.5 | 21.75 |   |
|                 | –                               | 30        | 30        | 44        | –                        | 59                           |                        | 286                   | 152                          | 394  | 635   | 663   | 375   | 657   | 343  | 165 | 552   |   |
| 718-30-31-20D   | –                               | 150       | 125       | 127       | –                        | 162                          | R206                   | 11.25                 | 6                            | 20   | 28.5  | 29.62 | 15.5  | 31.38 | 17   | 6.5 | 25.25 |   |
|                 | –                               | 46        | 38        | 58        | –                        | 73                           |                        | 286                   | 152                          | 508  | 724   | 752   | 394   | 797   | 432  | 165 | 641   |   |

### Notes:



A hose stop is necessary to keep spring from unwinding.

1. Specifications subject to change.
2. Reel models and capacities shown are for standard drag applications; for vertical lift applications, consult factory.
3. Other sizes, from standard components, available on request.
4. Finish: Refer to page 3.

5. Be sure to check dimensions and weights prior to ordering.

**NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.  
\*Dimensional weight may apply when shipped as a parcel package (via FedEx or UPS Ground).  
\*\*\* X, Y indicate mounting holes. See page 5.

### Available Roller Positions

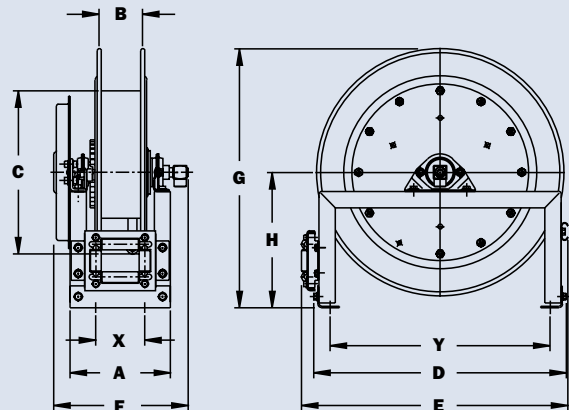

## Series N800

- Fuel Dispensing (Consult Factory)
- Waste Oil Evacuation • Air/Water

### To handle 3/4" or 1" I.D. hose.

- Narrow frame and compact mounting base.
- Non-sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlet: 90° balanced pressure swivel joint, 1" female NPT threads.
- Standard outlet: 1" female NPT threads.
- Standard pressures to 2000 psi (138 bar), available up to 6000 psi (414 bar) – must specify.
- Temperatures from -40°F to +250°F (-40°C to +121°C), optional temperatures to +400°F (+204°C) – must specify.
- 4-way roller assembly.
- SR and VR roller positions: swivel joint is standard on the right.  
TR roller positions: swivel joint is standard on the left.  
Other configurations available, must specify.
- Constant tension is available – consult factory.



Optional TR roller position shown

### PARTS DRAWING – ISO 81

| Model Number      | Hose Capacity of Reel<br>feet m |              |              | Approx. Weight<br>lb. kg |                              |                        | Standard Roller Assy. | Reel Dimensions***<br>in. mm |          |             |              |           |           |              |           |
|-------------------|---------------------------------|--------------|--------------|--------------------------|------------------------------|------------------------|-----------------------|------------------------------|----------|-------------|--------------|-----------|-----------|--------------|-----------|
|                   | I.D. in.<br>mm                  | 3/4<br>19    | 1<br>25      | NET                      | UPS/<br>FedEx<br>SHIP<br>Wt. | Freight<br>SHIP<br>Wt. |                       | A                            | B        | C           | E            | F         | G         | H            | X         |
|                   | O.D. in.<br>mm                  | 1-9/32<br>33 | 1-9/16<br>40 |                          |                              |                        |                       |                              |          |             |              |           |           |              |           |
| N816-19-20-10.5J  |                                 | 25<br>8      | 15<br>5      | 75<br>34                 | 83*<br>38                    | 110<br>50              | N204                  | 10<br>254                    | 4<br>102 | 10.5<br>267 | 20.75<br>527 | 13<br>330 | 20<br>508 | 10.62<br>270 | 8<br>203  |
| †N818-23-24-10.5J |                                 | 50†<br>15†   | 25†<br>8†    | 87<br>39                 | –<br>–                       | 122<br>55              | N206                  | 12<br>305                    | 6<br>152 | 10.5<br>267 | 23.75<br>603 | 15<br>381 | 24<br>610 | 12.62<br>321 | 10<br>254 |
| N816-25-26-10.5B  |                                 | 60<br>18     | 35<br>11     | 96<br>44                 | –<br>–                       | 131<br>59              | N204                  | 10<br>254                    | 4<br>102 | 10.5<br>267 | 25.25<br>641 | 13<br>330 | 26<br>660 | 13.62<br>346 | 8<br>203  |
| N818-25-26-10.5B  |                                 | 70<br>21     | 50<br>15     | 102<br>46                | –<br>–                       | 137<br>62              | N206                  | 12<br>305                    | 6<br>152 | 10.5<br>267 | 25.25<br>641 | 15<br>381 | 26<br>660 | 13.62<br>346 | 10<br>254 |

**Notes:**

**A hose stop is necessary to keep spring from unwinding.**

- Specifications subject to change.
- Reel models and capacities shown are for standard drag applications; for vertical lift applications, consult factory.
- Other sizes, from standard components, available on request.
- Finish:** Refer to page 3.

5. Be sure to check dimensions and weights prior to ordering.

**NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.

\*Dimensional weight may apply when shipped as a parcel package (via FedEx or UPS Ground).

\*\*\* X, Y indicate mounting holes. See page 5.

†Capacity based on low pressure air hose only.

**Available Roller Positions**



SR (STD)




VR (OPT)



TR (OPT)



TR (Wallmount)

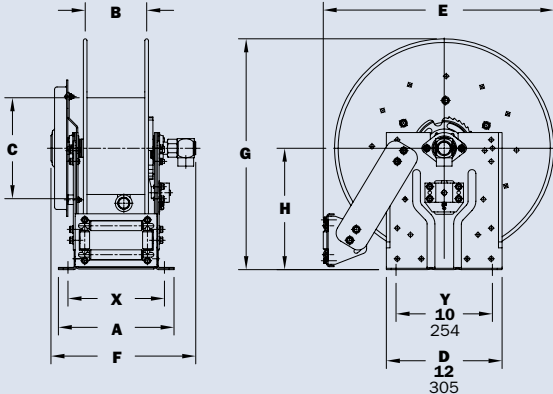

# Series 800

- Fuel Dispensing (Consult Factory)
- Waste Oil Evacuation • Air/Water

## To handle 3/4" or 1" I.D. hose.

- Rollformed channel frame for heavy-duty applications.
- Non-sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlet: 90° balanced pressure swivel joint, 1" female NPT threads.
- Standard outlet: 1" female NPT threads.
- Standard pressures to 2000 psi (138 bar), available up to 6000 psi (414 bar) – must specify.
- Temperatures from -40°F to +250°F (-40°C to +121°C), optional temperatures to +400°F (+204°C) – must specify.
- 4-way roller assembly.
- SR and VR roller positions: swivel joint is standard on the right. TR roller positions: swivel joint is standard on the left. Other configurations available, must specify.
- Constant tension is available – consult factory.



Standard configuration shown

## PARTS DRAWING – ISO 42

| Model Number     | Hose Capacity of Reel<br>feet m |              |              | Approx. Weight<br>lb. kg |      | Standard<br>Roller Assy. | Reel Dimensions***<br>in. mm |     |      |       |       |       |       |      |     |       |
|------------------|---------------------------------|--------------|--------------|--------------------------|------|--------------------------|------------------------------|-----|------|-------|-------|-------|-------|------|-----|-------|
|                  | I.D. in.<br>mm                  | 3/4<br>19    | 1<br>25      | NET                      | SHIP |                          | A                            | B   | C    | D     | E     | F     | G     | H    | X   | Y     |
|                  | O.D. in.<br>mm                  | 1-9/32<br>33 | 1-9/16<br>40 |                          |      |                          |                              |     |      |       |       |       |       |      |     |       |
| †818-23-24-10.5J |                                 | 50†          | 25†          | 87                       | 122  | R206                     | 11.25                        | 6   | 10.5 | 23.25 | 24.38 | 15.5  | 23.88 | 12.5 | 6.5 | 20    |
|                  |                                 | 15†          | 8†           | 39                       | 55   |                          | 286                          | 152 | 267  | 591   | 619   | 394   | 607   | 318  | 165 | 508   |
| 816-25-26-10.5B  |                                 | 60           | 35           | 96                       | 131  | R204                     | 9.25                         | 4   | 10.5 | 25    | 26.12 | 13.5  | 25.88 | 13.5 | 4.5 | 21.75 |
|                  |                                 | 18           | 11           | 44                       | 59   |                          | 235                          | 102 | 267  | 635   | 663   | 343   | 657   | 343  | 114 | 552   |
| 818-25-26-10.5B  |                                 | 70           | 50           | 102                      | 137  | R206                     | 11.25                        | 6   | 10.5 | 25    | 26.12 | 15.5  | 25.88 | 13.5 | 6.5 | 21.75 |
|                  |                                 | 21           | 15           | 46                       | 62   |                          | 286                          | 152 | 267  | 635   | 663   | 394   | 657   | 343  | 165 | 552   |
| 820-25-26-10.5A  |                                 | 85           | 75           | 131                      | 166  | R308                     | 13.25                        | 8   | 10.5 | 25    | 27    | 18.25 | 25.88 | 13.5 | 8.5 | 21.75 |
|                  |                                 | 26           | 23           | 59                       | 75   |                          | 337                          | 203 | 267  | 635   | 686   | 464   | 657   | 343  | 216 | 552   |
| 820-30-31-10.5A  |                                 | –            | 100          | 137                      | 172  | R308                     | 13.25                        | 8   | 10.5 | 28.5  | 30.5  | 18.25 | 31.38 | 17   | 8.5 | 25.25 |
|                  |                                 | –            | 30           | 62                       | 78   |                          | 337                          | 203 | 267  | 724   | 775   | 464   | 797   | 432  | 216 | 641   |
| 820-30-31-15.5A  |                                 | 100          | –            | 145                      | 180  | R308                     | 13.25                        | 8   | 15.5 | 28.5  | 30.5  | 18.25 | 31.38 | 17   | 8.5 | 25.25 |
|                  |                                 | 30           | –            | 66                       | 82   |                          | 337                          | 203 | 394  | 724   | 775   | 464   | 797   | 432  | 216 | 641   |

### Notes:

**A hose stop is necessary to keep spring from unwinding.**

- Specifications subject to change.
- Reel models and capacities shown are for standard drag applications; for vertical lift applications, consult factory.
- Other sizes, from standard components, available on request.
- Finish:** Refer to page 3.

**5. Be sure to check dimensions and weights prior to ordering.**

**NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.  
\*\*\* X, Y indicate mounting holes. See page 5.  
†Capacity based on low pressure air hose only.

### Available Roller Positions



SR (STD)




VR (OPT)



TR (OPT)



TR (Wallmount)

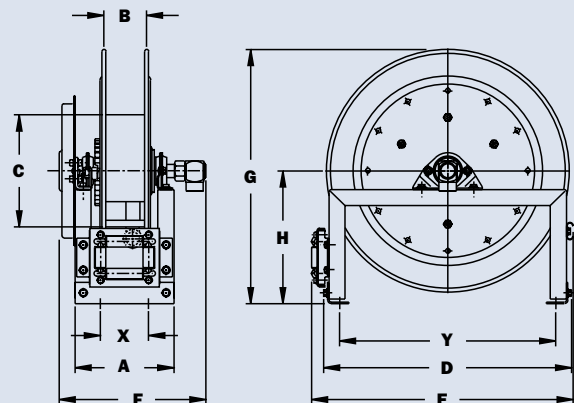

## Series 900

- Bulk Transfer • Fuel Dispensing (Consult Factory)
- Suction/Discharge (Consult Factory)

### To handle 1-1/4" or 1-1/2" I.D. hose.

- Rollformed channel frame construction.
- Non-sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlet: 90° swivel joint, 1-1/2" female NPT threads, and 2" Victaulic® groove.
- Standard outlet: 1-1/2" female NPT threads.
- Standard pressures to 600 psi (41 bar).
- Temperatures from -25°F to +250°F (-32°C to +121°C).
- 4-way roller assembly.
- SR and VR roller positions: swivel joint is standard on the right.  
TR roller positions: swivel joint is standard on the left.  
Other configurations available, must specify.
- Constant tension is available – consult factory.



Standard configuration shown

### PARTS DRAWING – ISO 29

| Model Number | Hose Capacity of Reel<br>feet m |               |              | Approx. Weight<br>lb. kg |      | Standard Roller Assy. | Reel Dimensions***<br>in. mm |     |       |       |       |       |      |      |       |
|--------------|---------------------------------|---------------|--------------|--------------------------|------|-----------------------|------------------------------|-----|-------|-------|-------|-------|------|------|-------|
|              | I.D. in.<br>mm                  | 1-1/4<br>32   | 1-1/2<br>38  | NET                      | SHIP |                       | A                            | B   | D     | E     | F     | G     | H    | X    | Y     |
|              | O.D. in.<br>mm                  | 1-13/16<br>46 | 2-1/16<br>52 |                          |      |                       |                              |     |       |       |       |       |      |      |       |
| 922-23-24B   |                                 | 40            | 25           | 104                      | 139  | R310                  | 15.25                        | 10  | 23.25 | 25.25 | 24    | 23.88 | 12.5 | 10.5 | 20    |
|              |                                 | 12            | 8            | 47                       | 63   |                       | 387                          | 254 | 591   | 641   | 610   | 607   | 318  | 267  | 508   |
| 920-25-26A   |                                 | 50            | 40           | 127                      | 162  | R308                  | 13.25                        | 8   | 25    | 27    | 22.75 | 25.88 | 13.5 | 8.5  | 21.75 |
|              |                                 | 15            | 12           | 58                       | 73   |                       | 337                          | 203 | 635   | 686   | 578   | 657   | 343  | 216  | 552   |
| 922-30-31A   |                                 | 75            | 50           | 156                      | 191  | R310                  | 15.25                        | 10  | 28.5  | 30.5  | 24.75 | 31.38 | 17   | 10.5 | 25.25 |
|              |                                 | 23            | 15           | 71                       | 87   |                       | 387                          | 254 | 724   | 775   | 629   | 797   | 432  | 267  | 641   |

Notes:

A hose stop is necessary to keep spring from unwinding.

1. Specifications subject to change.

2. Reel models and capacities shown are for standard drag applications; for vertical lift applications, consult factory.

3. Other sizes, from standard components, available on request.

4. Finish: Refer to page 3.

5. Be sure to check dimensions and weights prior to ordering.

NOTICE: A flexible connector must be used between the inlet pipe and the inlet swivel joint.

\*\*\* X, Y indicate mounting holes. See page 5.

Available Roller Positions



SR (STD)





VR (OPT)



TR (OPT)



TR (Wallmount)

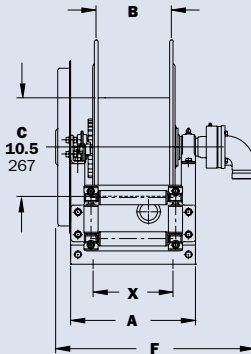



# Series 1000

- Pressure Washing • Washdown
- Spray Operations • Air

## To handle single 1/4", 3/8" or 1/2" I.D. hose.

- Lightweight, compact with an e-coated frame.
- Direct crank rewind permanently attached.
- Adjustable cam-lock brake standard.
- Exterior mounting holes for easier installation.
- Redesigned (and field installable) pin lock.
- Standard inlet: 90° ball bearing swivel joint, 1/2" female NPT threads.
- Standard outlet: 3/8" female NPT threads, 1/2" available upon request.
- Pressures to 3000 psi (207 bar).
- Temperatures from +20°F to +400°F (-7°C to +204°C).



Standard configuration shown with optional pin lock

## PARTS DRAWING – ISO 165

| Model Number | Hose Capacity of Reel<br>feet m |           |           |           | Approx. Weight<br>Crank Rewind<br>lb. kg |                           |                     | Reel Dimensions***<br>in. mm |      |     |   |
|--------------|---------------------------------|-----------|-----------|-----------|------------------------------------------|---------------------------|---------------------|------------------------------|------|-----|---|
|              | I.D. in.<br>mm                  | 1/4<br>6  | 3/8<br>10 | 1/2<br>13 | NET                                      | UPS/<br>FedEx<br>SHIP Wt. | Freight<br>SHIP Wt. | A                            | B    | F   | X |
|              | O.D. in.<br>mm                  | 5/8<br>16 | 3/4<br>19 | 7/8<br>22 |                                          |                           |                     |                              |      |     |   |
| 1014-14-16   | 100                             | 75        | 40        | 23        | 42*                                      | 58                        | 11.5                | 6                            | 18.5 | 10  |   |
|              | 31                              | 23        | 12        | 10        | 19                                       | 26                        | 292                 | 152                          | 470  | 254 |   |
| 1016-14-16   | 150                             | 100       | 70        | 24        | 42*                                      | 59                        | 13.5                | 8                            | 20.5 | 12  |   |
|              | 46                              | 31        | 21        | 11        | 19                                       | 27                        | 343                 | 203                          | 521  | 305 |   |
| 1020-14-16   | 250                             | 175       | 100       | 25        | 42*                                      | 60                        | 17.5                | 12                           | 24.5 | 16  |   |
|              | 76                              | 53        | 30        | 11        | 19                                       | 27                        | 445                 | 305                          | 622  | 406 |   |

Notes:

1. Specifications subject to change.

2. Other sizes, from standard components, available on request.

3. Finish: Refer to page 3.

4. Be sure to check dimensions and weights prior to ordering.

NOTICE: A flexible connector must be used between the inlet pipe and the inlet swivel joint.

\* Dimensional weight may apply when shipped as a parcel package (via FedEx or UPS Ground).

\*\*\* X, Y indicate mounting holes. See page 5.

## Series 1500

- Lawn Care • Pest Control • Pressure Washing
- Agriculture • Steam Cleaning

### To handle single 1/4" through 5/8" I.D. hose.

- Lightweight, compact reels designed for long lengths of hose in manual and power rewind.
- Direct crank rewind is permanently attached.
- Chain and sprocket drive powered by electric, hydraulic or compressed air motor.
- Manual reels include cam-lock drag brake, spring actuated pin lock.
- Standard inlet: 90° ball bearing swivel joint, 1/2" female NPT threads.
- Standard outlet: 1/2" female NPT threads.
- Standard pressures to 3000 psi (207 bar), available up to 10,000 psi (690 bar) – must specify.
- Temperatures from +20°F to +400°F (-7°C to +204°C).
- Rollers and roller mounting brackets are accessory items. Specify roller position.



Crank rewind  
Standard  
configuration  
shown



### Optional External Mounting Brackets

Part No. 9906.0027.

Add 2-1/2" to the X dimensions shown in the chart.

### PARTS DRAWING – ISO 90 (POWER); ISO 179 (MANUAL)

| Model Number<br><small>For power rewind see Note 5</small> | Hose Capacity of Reel<br>feet m |            |            |            |            | Approx. Weight<br>Crank Rewind<br>lb. kg<br><small>see Note 3</small> |                              |                        | Reel Dimensions***<br>in. mm |           |             |            |              |             |             |
|------------------------------------------------------------|---------------------------------|------------|------------|------------|------------|-----------------------------------------------------------------------|------------------------------|------------------------|------------------------------|-----------|-------------|------------|--------------|-------------|-------------|
|                                                            | I.D. in.<br>mm                  | 1/4<br>6   | 3/8<br>10  | 1/2<br>13  | 5/8<br>16  | NET                                                                   | UPS/<br>FedEx<br>SHIP<br>Wt. | Freight<br>SHIP<br>Wt. | A                            | B         | E<br>CRANK  | E<br>POWER | F<br>CRANK   | F<br>POWER  | X           |
|                                                            | O.D. in.<br>mm                  | 5/8<br>16  | 3/4<br>19  | 7/8<br>22  | 1<br>25    |                                                                       |                              |                        |                              |           |             |            |              |             |             |
| 1514-17-18                                                 |                                 | 175<br>53  | 125<br>38  | 75<br>23   | 50<br>15   | 27<br>12                                                              | 65*<br>30                    | 62<br>28               | 11<br>279                    | 6<br>152  | 16.5<br>419 | 19<br>483  | 18.5<br>470  | 16.5<br>419 | 9.5<br>241  |
| 1520-17-18                                                 |                                 | 350<br>107 | 275<br>84  | 175<br>53  | 125<br>38  | 29<br>13                                                              | 80*<br>36                    | 64<br>29               | 17<br>432                    | 12<br>305 | 16.5<br>419 | 19<br>483  | 24.5<br>622  | 22.5<br>572 | 15.5<br>394 |
| 1526-17-18                                                 |                                 | 500<br>152 | 400<br>122 | 300<br>91  | 200<br>61  | 31<br>14                                                              | 98*<br>45                    | 66<br>30               | 23<br>584                    | 18<br>457 | 16.5<br>419 | 19<br>483  | 30.5<br>775  | 28.5<br>724 | 21.5<br>546 |
| 1530-17-18                                                 |                                 | –<br>–     | 500<br>152 | 375<br>114 | 275<br>84  | 33<br>15                                                              | 110*<br>50                   | 68<br>31               | 27<br>686                    | 22<br>559 | 16.5<br>419 | 19<br>483  | 34.5<br>876  | 32.5<br>826 | 25.5<br>648 |
| 1536-17-18                                                 |                                 | –<br>–     | –<br>–     | 475<br>145 | 350<br>107 | 35<br>16                                                              | 129*<br>59                   | 70<br>32               | 33<br>838                    | 28<br>711 | 16.5<br>419 | 19<br>483  | 40.5<br>1029 | 38.5<br>978 | 31.5<br>800 |

#### Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown.
- Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models (does not apply to FedEx or UPS):

|           | Net lbs/kg | Ship lbs/kg |
|-----------|------------|-------------|
| Electric  | 18/8.2     | 18/8.2      |
| Hydraulic | 15/6.8     | 15/6.8      |
| Air       | 15/6.8     | 15/6.8      |

- Dimension "F" is the overall length of standard model reels.

- When ordering power rewind models, prefix model number with:

A = Air Rewind –  
Supplied with control valve and 18" air hose.


E = Electric Rewind –  
12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately.

HD = Hydraulic Rewind –  
Not supplied with control valve.

- Manual rewind available in RT or LB configurations only.
- Finish: Refer to page 3.
- Be sure to check dimensions and weights prior to ordering.
- Some roller options may prohibit the use of our molded chain guard.

NOTICE: A flexible connector must be used between the inlet pipe and the inlet swivel joint.  
\* Dimensional weight applies when shipped as a parcel package (via FedEx or UPS Ground).

\*\*\* X, Y indicate mounting holes. See page 5.

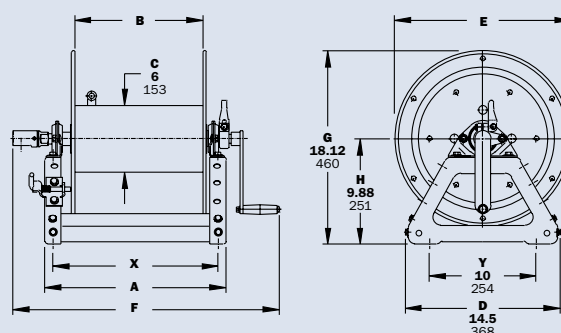

Crank rewind shown

# Series 1800

• Air Compressors • Washdown

## To handle single 5/8" or 3/4" I.D. hose.

- Lightweight, compact reels designed for long lengths of hose in manual and power rewind.
- Direct crank rewind is permanently attached.
- Chain and sprocket drive powered by electric, hydraulic or compressed air motor.
- Manual reels include cam-lock drag brake, spring actuated pin lock.
- Standard inlet: 90° ball bearing swivel joint, 1" female NPT threads.
- Standard outlet: 3/4" female NPT threads.
- Standard pressures to 2000 psi (138 bar), available up to 4000 psi (276 bar) – must specify.
- Temperatures from -40°F to +250°F (-40°C to +121°C).
- Rollers and roller mounting brackets are accessory items. Specify roller position.



Electric rewind  
Standard configuration shown



### Optional External Mounting Brackets

Part No. 9906.0027.

Add 2-1/2" to the X dimensions shown in the chart.

## PARTS DRAWING – ISO 136 (POWER); ISO 180 (MANUAL)

| Model Number<br>For power rewind<br>see Note 5 | Hose Capacity of Reel<br>feet m |                  |                  | Approx. Weight<br>Crank Rewind<br>lb. kg<br>see Note 3 |                           |                     | Reel Dimensions***<br>in. mm |                  |                    |                  |                      |                    |                    |
|------------------------------------------------|---------------------------------|------------------|------------------|--------------------------------------------------------|---------------------------|---------------------|------------------------------|------------------|--------------------|------------------|----------------------|--------------------|--------------------|
|                                                | I.D. in.<br>mm                  | 5/8<br>16        | 3/4<br>19        | NET                                                    | UPS/<br>FedEx<br>SHIP Wt. | Freight<br>SHIP Wt. | A                            | B                | E<br>CRANK         | E<br>POWER       | F<br>CRANK           | F<br>POWER         | X                  |
|                                                | O.D. in.<br>mm                  | 1<br>25          | 1-9/32<br>40     |                                                        |                           |                     |                              |                  |                    |                  |                      |                    |                    |
| <b>1816-17-18</b>                              |                                 | <b>75</b><br>23  | <b>50</b><br>15  | <b>28</b><br>13                                        | <b>80*</b><br>36          | <b>63</b><br>29     | <b>13</b><br>330             | <b>8</b><br>203  | <b>16.5</b><br>419 | <b>19</b><br>483 | <b>23.38</b><br>594  | <b>18.5</b><br>470 | <b>11.5</b><br>292 |
| <b>1822-17-18</b>                              |                                 | <b>150</b><br>46 | <b>100</b><br>30 | <b>30</b><br>14                                        | <b>98*</b><br>45          | <b>65</b><br>29     | <b>19</b><br>483             | <b>14</b><br>356 | <b>16.5</b><br>419 | <b>19</b><br>483 | <b>29.38</b><br>746  | <b>24.5</b><br>622 | <b>17.5</b><br>445 |
| <b>1826-17-18</b>                              |                                 | <b>200</b><br>61 | <b>125</b><br>38 | <b>32</b><br>15                                        | <b>98*</b><br>45          | <b>67</b><br>30     | <b>23</b><br>584             | <b>18</b><br>457 | <b>16.5</b><br>419 | <b>19</b><br>483 | <b>33.38</b><br>848  | <b>28.5</b><br>724 | <b>21.5</b><br>546 |
| <b>1830-17-18</b>                              |                                 | <b>250</b><br>76 | <b>150</b><br>46 | <b>33</b><br>15                                        | <b>110*</b><br>50         | <b>68</b><br>31     | <b>27</b><br>686             | <b>22</b><br>559 | <b>16.5</b><br>419 | <b>19</b><br>483 | <b>37.38</b><br>950  | <b>32.5</b><br>826 | <b>25.5</b><br>648 |
| <b>1836-17-18</b>                              |                                 | <b>300</b><br>91 | <b>200</b><br>61 | <b>36</b><br>16                                        | <b>129*</b><br>59         | <b>71</b><br>32     | <b>33</b><br>838             | <b>28</b><br>711 | <b>16.5</b><br>419 | <b>19</b><br>483 | <b>43.38</b><br>1102 | <b>38.5</b><br>978 | <b>31.5</b><br>800 |

### Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown.
- Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models (does not apply to FedEx or UPS):

|                  | Net lbs/kg    | Ship lbs/kg   |
|------------------|---------------|---------------|
| <b>Electric</b>  | <b>18/8.2</b> | <b>18/8.2</b> |
| <b>Hydraulic</b> | <b>15/6.8</b> | <b>15/6.8</b> |
| <b>Air</b>       | <b>15/6.8</b> | <b>15/6.8</b> |

- Dimension "F" is the overall length of standard model reels.

- When ordering power rewind models, prefix model number with:

**A** = Air Rewind –  
Supplied with control valve and 18" air hose.

**E** = Electric Rewind –  
12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately.

**HD** = Hydraulic Rewind –  
Not supplied with control valve.

- Manual rewind available in RT or LB configurations only.

- Finish:** Refer to page 3.


- Be sure to check dimensions and weights prior to ordering.**

- Some roller options may prohibit the use of our molded chain guard.

**NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.

\* Dimensional weight applies when shipped as a parcel package (via FedEx or UPS Ground).

\*\*\* X, Y indicate mounting holes. See page 5.

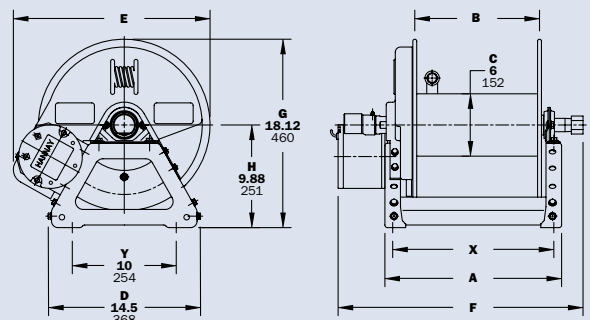

Power rewind shown

## Series 2000 | Dual Hose

• Hydraulics • Spray Painting • Air/Water

### To handle dual 1/4" through 1/2" I.D. hose.

- Two swivel joint inlets and two outlet risers to handle two equal lengths of hose.
  - Chain-driven crank rewind or chain and sprocket rewind powered by an electric or compressed air motor.
  - MX crank rewind reels have pinion brake as standard.
  - Power rewind reels are not supplied with a brake.
  - Standard inlets: 90° ball bearing swivel joints, 1/2" female NPT threads.
  - Standard outlets: 1/2" female NPT threads.
  - Standard pressures to 3000 psi (207 bar), available up to 10,000 psi (690 bar) – must specify.
  - Temperatures from +20°F to +400°F (-7°C to +204°C).
  - Reels for use with oxygen/acetylene.
- See Series 2400 Hannay Reels Welding Catalog H0408-W.



Electric rewind  
Standard  
configuration  
shown



### Optional External Mounting Brackets

Part No. 9906.0027.  
Add 2-1/2" to the X dimensions  
shown in the chart.

### PARTS DRAWING – ISO 112

| Model Number<br><small>For power rewind<br/>see Note 5</small> | Hose Capacity of Reel<br>feet m |              |              |           | Approx. Weight<br>Crank Rewind3<br>lb. kg<br><small>see Note 3</small> |                           |                     | Reel Dimensions***<br>in. mm |           |             |            |            |            |             |
|----------------------------------------------------------------|---------------------------------|--------------|--------------|-----------|------------------------------------------------------------------------|---------------------------|---------------------|------------------------------|-----------|-------------|------------|------------|------------|-------------|
|                                                                | I.D. in.<br>mm                  | 1/4<br>6     | 3/8<br>10    | 1/2<br>13 | NET                                                                    | UPS/<br>FedEx<br>SHIP Wt. | Freight<br>SHIP Wt. | A                            | B         | E<br>CRANK  | E<br>POWER | F<br>CRANK | F<br>POWER | X           |
|                                                                | O.D. in.<br>mm                  | 5/8<br>16    | 3/4<br>19    | 7/8<br>22 |                                                                        |                           |                     |                              |           |             |            |            |            |             |
| <b>2016-17-18</b>                                              | <b>2/100</b>                    | <b>2/75</b>  | <b>2/50</b>  | <b>32</b> | <b>80*</b>                                                             | <b>67</b>                 |                     | <b>13</b>                    | <b>8</b>  | <b>18.5</b> | <b>19</b>  | <b>21</b>  | <b>20</b>  | <b>11.5</b> |
|                                                                | 2/31                            | 2/23         | 2/15         | 15        | 36                                                                     | 30                        |                     | 330                          | 203       | 470         | 483        | 533        | 508        | 292         |
| <b>2020-17-18</b>                                              | <b>2/175</b>                    | <b>2/125</b> | <b>2/75</b>  | <b>34</b> | <b>98*</b>                                                             | <b>69</b>                 |                     | <b>17</b>                    | <b>12</b> | <b>18.5</b> | <b>19</b>  | <b>25</b>  | <b>24</b>  | <b>15.5</b> |
|                                                                | 2/53                            | 2/38         | 2/23         | 15        | 45                                                                     | 31                        |                     | 432                          | 305       | 470         | 483        | 635        | 610        | 394         |
| <b>2026-17-18</b>                                              | <b>2/275</b>                    | <b>2/200</b> | <b>2/125</b> | <b>36</b> | <b>110*</b>                                                            | <b>71</b>                 |                     | <b>23</b>                    | <b>18</b> | <b>18.5</b> | <b>19</b>  | <b>31</b>  | <b>30</b>  | <b>21.5</b> |
|                                                                | 2/84                            | 2/61         | 2/38         | 16        | 50                                                                     | 32                        |                     | 584                          | 457       | 470         | 483        | 787        | 762        | 546         |
| <b>2030-17-18</b>                                              | <b>2/350</b>                    | <b>2/250</b> | <b>2/175</b> | <b>37</b> | <b>129*</b>                                                            | <b>72</b>                 |                     | <b>27</b>                    | <b>22</b> | <b>18.5</b> | <b>19</b>  | <b>35</b>  | <b>34</b>  | <b>25.5</b> |
|                                                                | 2/107                           | 2/76         | 2/53         | 17        | 59                                                                     | 33                        |                     | 686                          | 559       | 470         | 483        | 889        | 864        | 648         |
| <b>2036-17-18</b>                                              | <b>2/425</b>                    | <b>2/300</b> | <b>2/225</b> | <b>39</b> | <b>129*</b>                                                            | <b>74</b>                 |                     | <b>33</b>                    | <b>28</b> | <b>18.5</b> | <b>19</b>  | <b>41</b>  | <b>40</b>  | <b>31.5</b> |
|                                                                | 2/130                           | 2/91         | 2/69         | 18        | 59                                                                     | 34                        |                     | 838                          | 711       | 470         | 483        | 1041       | 1016       | 800         |

#### Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown.
- Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models (does not apply to FedEx or UPS):

|                 | Net lbs/kg    | Ship lbs/kg   |
|-----------------|---------------|---------------|
| <b>Electric</b> | <b>18/8.2</b> | <b>18/8.2</b> |
| <b>Air</b>      | <b>15/6.8</b> | <b>15/6.8</b> |
- Dimension "F" is the overall length of standard model reels. MX chain-drive crank models require 2" clearance to remove crank handle.
- When ordering power rewind models, prefix model number with:

**A** = Air Rewind –  
Supplied with control valve and 18" air hose.

**E** = Electric Rewind –  
12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately.

**MX** = Chain-Driven Crank.

**6. Finish:** Refer to page 3.


**7. Be sure to check dimensions and weights prior to ordering.**

**8. Some roller options may prohibit the use of our molded chain guard.**

**NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.

\* Dimensional weight applies when shipped as a parcel package (via FedEx or UPS Ground).

\*\*\* X, Y indicate mounting holes. See page 5.

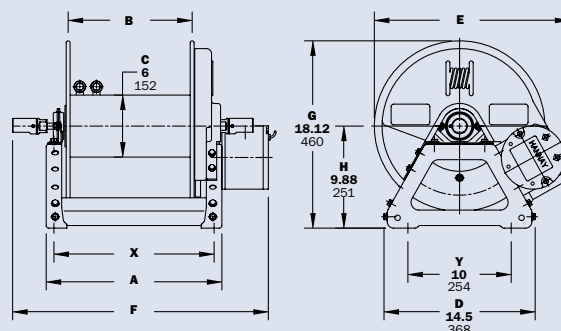

Power rewind shown



## Dual Hose | Series G2000

• Hydraulics • Spray Painting • Air/Water

### To handle dual 1/4" through 1/2" I.D. hose.

- Two swivel joint inlets and two outlet risers to handle two equal lengths of hose.
- Gear-driven crank rewind.
- Pinion brake as standard.
- Standard inlets: 90° ball bearing swivel joints, 1/2" female NPT threads.
- Standard outlets: 1/2" female NPT threads.
- Standard pressures to 3000 psi (207 bar), available up to 10,000 psi (690 bar) – must specify.
- Temperatures from +20°F to +400°F (-7°C to +204°C).
- For power rewind, see Series 2000, page 20.
- Reels for use with oxygen/acetylene.  
See Series 2400 Hannay Reels Welding Catalog H0408-W.



Standard gear-driven crank rewind with optional finish shown



### Optional External Mounting Brackets

Part No. 9906.0027.

Add 2-1/2" to the X dimensions shown in the chart.

### PARTS DRAWING – ISO 205

| Model Number         | Hose Capacity of Reel<br>feet m |              |              |           | Approx. Weight<br>Crank Rewind<br>lb. kg |                           |                     | Reel Dimensions***<br>in. mm |           |           |             |
|----------------------|---------------------------------|--------------|--------------|-----------|------------------------------------------|---------------------------|---------------------|------------------------------|-----------|-----------|-------------|
|                      | I.D. in.<br>mm                  | 1/4<br>6     | 3/8<br>10    | 1/2<br>13 | NET                                      | UPS/<br>FedEx<br>SHIP Wt. | Freight<br>SHIP Wt. | A                            | B         | F         | X           |
|                      | O.D. in.<br>mm                  | 5/8<br>16    | 3/4<br>19    | 7/8<br>22 |                                          |                           |                     |                              |           |           |             |
| <b>G2016-17-18-8</b> | <b>2/75</b>                     | <b>2/50</b>  | <b>2/35</b>  | <b>40</b> | <b>80*</b>                               | <b>75</b>                 |                     | <b>13</b>                    | <b>8</b>  | <b>21</b> | <b>11.5</b> |
|                      | 2/23                            | 2/15         | 2/11         | 15        | 36                                       | 34                        |                     | 330                          | 203       | 533       | 292         |
| <b>G2020-17-18-8</b> | <b>2/125</b>                    | <b>2/100</b> | <b>2/50</b>  | <b>42</b> | <b>98*</b>                               | <b>77</b>                 |                     | <b>17</b>                    | <b>12</b> | <b>25</b> | <b>15.5</b> |
|                      | 2/38                            | 2/31         | 2/15         | 18        | 45                                       | 35                        |                     | 432                          | 305       | 635       | 394         |
| <b>G2026-17-18-8</b> | <b>2/200</b>                    | <b>2/150</b> | <b>2/100</b> | <b>44</b> | <b>110*</b>                              | <b>79</b>                 |                     | <b>23</b>                    | <b>18</b> | <b>31</b> | <b>21.5</b> |
|                      | 2/61                            | 2/46         | 2/31         | 19        | 50                                       | 36                        |                     | 584                          | 457       | 787       | 546         |

**Notes:**

1. Specifications subject to change.
2. Upon request, reels can be supplied with drum lengths other than shown.
3. **Finish:** Refer to page 3.
4. **Be sure to check dimensions and weights prior to ordering.**

**NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.

\* Dimensional weight applies when shipped as a parcel package (via FedEx or UPS Ground).

\*\*\* X, Y indicate mounting holes. See page 5.

## Series 3000

- Fuel Dispensing (Consult Factory) • Spray Operations
- Fire Protection

### To handle 3/4" or 1" I.D. hose.

- Economical manual rewind reels for long lengths of hose.
- Choose disc rewind or removable direct crank rewind.
- Supplied with spring actuated pin lock.
- Standard inlet: 90° ball bearing swivel joint, 1" female NPT threads.
- Standard outlet: 1" female NPT thread.
- Standard: inlet, outlet riser, and hub assembly are steel. Options: swivel joint also available in aluminum or stainless steel. Riser and hub assembly also available in stainless steel.
- Standard pressures to 2000 psi (138 bar), available up to 4000 psi (276 bar) – must specify.
- Temperatures from -60°F to +250°F (-51°C to +121°C).
- Rollers and roller mounting brackets are accessory items. Specify roller position.



Standard configuration with crank handle shown



**Optional Aluminum Hand Cart**  
4300-AL mounting available.



### PARTS DRAWING – ISO 113

| Model Number      | Hose Capacity of Reel<br>feet m |                  |                  |                      | Approx. Weight<br>Crank Rewind<br>lb. kg |                  | Reel Dimensions***<br>In. mm |                    |                     |                    |
|-------------------|---------------------------------|------------------|------------------|----------------------|------------------------------------------|------------------|------------------------------|--------------------|---------------------|--------------------|
|                   | I.D. in.<br>mm                  | Round Hose       |                  | Collapsible<br>Hose  | NET                                      | SHIP             | A                            | B                  | F                   | X                  |
|                   |                                 | 3/4<br>19        | 1<br>25          | 1<br>25              |                                          |                  |                              |                    |                     |                    |
|                   | O.D. in.<br>mm                  | 1-9/32<br>33     | 1-9/16<br>40     | 1/2x1-3/4<br>13 x 44 |                                          |                  |                              |                    |                     |                    |
| <b>3016-25-26</b> |                                 | <b>100</b><br>30 | <b>50</b><br>15  | <b>200</b><br>61     | <b>85</b><br>39                          | <b>120</b><br>54 | <b>13</b><br>330             | <b>7.5</b><br>191  | <b>23.75</b><br>603 | <b>7.75</b><br>197 |
| <b>3020-25-26</b> |                                 | <b>150</b><br>46 | <b>100</b><br>30 | <b>300</b><br>91     | <b>94</b><br>43                          | <b>129</b><br>59 | <b>17</b><br>432             | <b>11.5</b><br>292 | <b>27.75</b><br>705 | <b>9</b><br>229    |
| <b>3024-25-26</b> |                                 | <b>250</b><br>76 | <b>150</b><br>46 | <b>400</b><br>122    | <b>103</b><br>47                         | <b>138</b><br>63 | <b>21</b><br>533             | <b>15.5</b><br>394 | <b>31.75</b><br>806 | <b>13</b><br>330   |
| <b>3028-25-26</b> |                                 | <b>300</b><br>91 | <b>200</b><br>61 | <b>550</b><br>168    | <b>113</b><br>51                         | <b>155</b><br>70 | <b>25.5</b><br>648           | <b>20</b><br>508   | <b>36.25</b><br>921 | <b>17.5</b><br>445 |

#### Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
- Power rewind NOT available on these models.**
- Dimension "F" is the overall length of standard model reels. For crank rewind models, 3-1/2" clearance is required to remove crank.
- Subtract 5" from "F" dimension for disc rewind models.
- Finish:** Call factory for offshore/marine finish, available at extra cost. Refer to page 3.
- Be sure to check dimensions and weights prior to ordering.**

**NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.  
\*\*\* X, Y indicate mounting holes. See page 5.



# Series 3500

- Fuel Dispensing (Consult Factory) • Bulk Transfer
- Fire Protection

## To handle 1" through 1-3/4" I.D. hose.

- Economical manual rewind reels for long lengths of hose.
- Choose disc rewind or removable direct crank rewind.
- Supplied with spring actuated pin lock.
- Standard inlet: 90° ball bearing swivel joint, 1-1/2" female NPT threads, and 2" Victaulic® groove.
- Standard outlet: flanged riser with 1-1/2" female NPT threads.
- Standard: inlet, outlet riser, and hub assembly are steel. Options: also available in aluminum or stainless steel.
- Standard pressures to 600 psi (41 bar), available up to 1000 psi (69 bar) – must specify.
- Temperatures from -25°F to +250°F (-32°C to +121°C).
- Rollers and roller mounting brackets are accessory items. Specify roller position.



Standard configuration shown



### Optional Aluminum Hand Cart

4300-AL mounting available.

## PARTS DRAWING – ISO 111


| Model Number | Hose Capacity of Reel<br>feet m |            |           |                  |            | Approx. Weight<br>Crank Rewind<br>lb. kg |      | Reel Dimensions***<br>in. mm |      |       |      |       |      |      |
|--------------|---------------------------------|------------|-----------|------------------|------------|------------------------------------------|------|------------------------------|------|-------|------|-------|------|------|
|              | I.D. in.<br>mm                  | Round Hose |           | Collapsible Hose |            | NET                                      | SHIP | A                            | B    | E     | F    | G     | H    | X    |
|              |                                 | 1          | 1-1/2     | 1-1/2            | 1-3/4      |                                          |      |                              |      |       |      |       |      |      |
|              | O.D. in.<br>mm                  | 25<br>640  | 38<br>965 | 38<br>965        | 44<br>1118 |                                          |      |                              |      |       |      |       |      |      |
| 3516-25-26   | 50                              | –          | –         | 50               | 50         | 95                                       | 130  | 13                           | 7.5  | 24.75 | 26   | 27.88 | 15.5 | 7.75 |
|              | 15                              | –          | –         | 15               | 15         | 43                                       | 59   | 330                          | 191  | 629   | 660  | 708   | 394  | 197  |
| 3520-25-26   | 100                             | 50         | 100       | 75               | 104        | 139                                      | 139  | 17                           | 11.5 | 24.75 | 30   | 27.88 | 15.5 | 9    |
|              | 30                              | 15         | 30        | 23               | 47         | 63                                       | 63   | 432                          | 292  | 629   | 762  | 708   | 394  | 229  |
| 3524-25-26   | 150                             | 75         | 150       | 100              | 113        | 157                                      | 157  | 21                           | 15.5 | 24.75 | 34   | 27.88 | 15.5 | 13   |
|              | 46                              | 23         | 46        | 30               | 51         | 71                                       | 71   | 533                          | 394  | 629   | 864  | 708   | 394  | 330  |
| 3528-25-26   | 200                             | 100        | 200       | 150              | 123        | 173                                      | 173  | 25.5                         | 20   | 24.75 | 38.5 | 27.88 | 15.5 | 17.5 |
|              | 61                              | 30         | 61        | 46               | 56         | 78                                       | 78   | 648                          | 508  | 629   | 978  | 708   | 394  | 445  |
| 3524-30-31   | 200                             | 100        | 250       | 150              | 124        | 174                                      | 174  | 21                           | 15.5 | 28.75 | 34   | 29.88 | 15.5 | 13   |
|              | 61                              | 30         | 76        | 46               | 56         | 79                                       | 79   | 533                          | 394  | 730   | 864  | 759   | 394  | 330  |
| 3528-30-31   | 250                             | 150        | 300       | 250              | 134        | 184                                      | 184  | 25.5                         | 20   | 28.75 | 38.5 | 29.88 | 15.5 | 17.5 |
|              | 76                              | 46         | 91        | 76               | 61         | 83                                       | 83   | 648                          | 508  | 730   | 978  | 759   | 394  | 445  |
| 3534-30-31   | 350                             | 200        | 450       | 350              | 147        | 197                                      | 197  | 31.5                         | 26   | 28.75 | 44.5 | 29.88 | 15.5 | 23.5 |
|              | 107                             | 61         | 137       | 107              | 67         | 89                                       | 89   | 800                          | 660  | 730   | 1130 | 759   | 394  | 597  |
| 3530-33-34   | 400                             | 250        | 450       | 350              | 138        | 188                                      | 188  | 27.5                         | 22   | 31.75 | 40.5 | 32.38 | 16.5 | 19.5 |
|              | 122                             | 76         | 137       | 107              | 63         | 85                                       | 85   | 699                          | 559  | 806   | 1029 | 822   | 419  | 495  |

### Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
- Power rewind NOT available on these models.
- Dimension "F" is the overall length of standard model reels. For crank rewind models, 3-1/2" clearance is required to remove crank.
- Subtract 5" from "F" dimension for disc rewind models.
- Finish: Call factory for offshore/marine finish, available at extra cost. Refer to page 3.
- Be sure to check dimensions and weights prior to ordering.

**NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.

\*\*\* X, Y indicate mounting holes. See page 5.

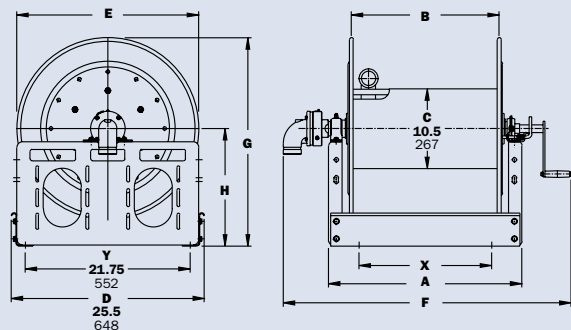

## Series 4000

- Fuel Dispensing (Consult Factory) • Water Supply
- Fire Protection • Chemical Transfer

### To handle single 3/4" or 1" I.D. hose.

- Lightweight, compact reels designed for long lengths of hose in manual and power rewind.
- Direct crank rewind is removable.
- Chain and sprocket drive powered by electric, hydraulic or compressed air motor.
- Manual reels include cam-lock drag brake, spring actuated pin lock.
- Strap brake is standard on power rewind reels.
- Standard inlet: 90° ball bearing swivel joint, 1" female NPT threads.
- Standard outlet: 1" female NPT threads.
- Standard pressures to 2000 psi (138 bar), available up to 4000 psi (276 bar) – must specify.
- Temperatures from -60°F to +250°F (-51°C to +121°C).
- Rollers and roller mounting brackets are accessory items. Specify roller position.



Electric rewind  
Standard  
configuration  
shown



### Optional External Mounting Brackets

Part No. 9906.0027.

Add 2-1/2" to the X dimensions shown in the chart.

### PARTS DRAWING – ISO 68

| Model Number<br><br>For power rewind<br>see Note 5 | Hose Capacity of Reel<br>feet m |              |              | Approx. Weight<br>Crank Rewind<br>lb. kg<br>see Note 3 |                           |                     | Reel Dimensions***<br>in. mm |      |            |            |            |            |   |
|----------------------------------------------------|---------------------------------|--------------|--------------|--------------------------------------------------------|---------------------------|---------------------|------------------------------|------|------------|------------|------------|------------|---|
|                                                    | I.D. in.<br>mm                  | 3/4<br>19    | 1<br>25      | NET                                                    | UPS/<br>FedEx<br>SHIP Wt. | Freight<br>SHIP Wt. | A                            | B    | E<br>CRANK | E<br>POWER | F<br>CRANK | F<br>POWER | X |
|                                                    | O.D. in.<br>mm                  | 1-9/32<br>33 | 1-9/16<br>40 |                                                        |                           |                     |                              |      |            |            |            |            |   |
| 4018-17-18                                         | 50                              | 35           | 36           | 80*                                                    | 71                        | 15                  | 10                           | 16.5 | 19         | 27         | 20.5       | 13.5       |   |
|                                                    | 15                              | 11           | 16           | 36                                                     | 32                        | 381                 | 254                          | 419  | 483        | 686        | 521        | 343        |   |
| 4024-17-18                                         | 100                             | 50           | 46           | 98*                                                    | 81                        | 21                  | 16                           | 16.5 | 19         | 33         | 26.5       | 19.5       |   |
|                                                    | 30                              | 15           | 21           | 45                                                     | 37                        | 533                 | 406                          | 419  | 483        | 838        | 673        | 495        |   |
| 4030-17-18                                         | 150                             | 75           | 57           | 110*                                                   | 92                        | 27                  | 22                           | 16.5 | 19         | 39         | 32.5       | 25.5       |   |
|                                                    | 46                              | 23           | 26           | 50                                                     | 42                        | 686                 | 559                          | 419  | 483        | 991        | 826        | 648        |   |
| 4038-17-18                                         | 200                             | 100          | 70           | —                                                      | 124                       | 35                  | 30                           | 16.5 | 19         | 47         | 40.5       | 33.5       |   |
|                                                    | 61                              | 30           | 32           | —                                                      | 56                        | 889                 | 762                          | 419  | 483        | 1194       | 1029       | 851        |   |

#### Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown.
- Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models (does not apply to FedEx or UPS):

|                  | Net lbs/kg    | Ship lbs/kg   |
|------------------|---------------|---------------|
| <b>Electric</b>  | <b>18/8.2</b> | <b>18/8.2</b> |
| <b>Hydraulic</b> | <b>15/6.8</b> | <b>15/6.8</b> |
| <b>Air</b>       | <b>15/6.8</b> | <b>15/6.8</b> |

- Dimension "F" is the overall length of standard model reels. Crank rewind reels require 3-1/2" clearance to remove or install crank handle.

- When ordering power rewind models, prefix model number with:

**A** = Air Rewind –  
Supplied with control valve and 18" air hose.

**E** = Electric Rewind –  
12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately.

**HD** = Hydraulic Rewind –  
Not supplied with control valve.

- Finish:** Refer to page 3.


- Be sure to check dimensions and weights prior to ordering.**

- Some roller options may prohibit the use of our molded chain guard.

**NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.

\* Dimensional weight applies when shipped as a parcel package (via FedEx or UPS Ground).

\*\*\* X, Y indicate mounting holes. See page 5.  
(Also applies for external mounting brackets.)

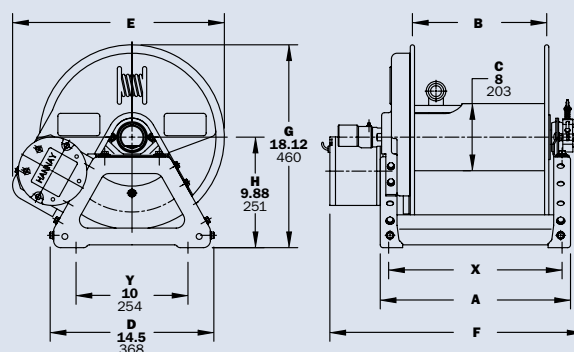

Power rewind shown

# Series 4100

- Fuel Dispensing (Consult Factory) • Water Supply
- Fire Protection • Chemical Transfer

## To handle single 3/4" or 1" I.D. hose.

- Lightweight, compact reels designed for long lengths of hose in manual and power rewind.
- Gear-driven crank rewind handle is removable.
- Chain and sprocket drive powered by electric, hydraulic or compressed air motor.
- Gear-driven crank rewind, adjustable pinion brake.
- Standard inlet: 90° ball bearing swivel joint, 1" female NPT threads.
- Standard outlet: 1" female NPT threads.
- Standard pressures to 2000 psi (138 bar), available up to 4000 psi (276 bar) – must specify.
- Temperatures from -60°F to +250°F (-51°C to +121°C).
- Rollers and roller mounting brackets are accessory items. Specify roller position.



Electric rewind with gear-driven crank rewind and optional finish shown

## PARTS DRAWING – ISO 206

| Model Number<br>For power rewind see Note 5 | Hose Capacity of Reel<br>feet m |              |              | Approx. Weight<br>Crank Rewind<br>lb. kg<br>see Note 3 |            | Reel Dimensions***<br>in. mm |           |            |             |             |             |
|---------------------------------------------|---------------------------------|--------------|--------------|--------------------------------------------------------|------------|------------------------------|-----------|------------|-------------|-------------|-------------|
|                                             | I.D. in.<br>mm                  | 3/4<br>19    | 1<br>25      | NET                                                    | SHIP       | A                            | B         | E<br>CRANK | E<br>POWER  | F           | X           |
|                                             | O.D. in.<br>mm                  | 1-9/32<br>33 | 1-9/16<br>40 |                                                        |            |                              |           |            |             |             |             |
| <b>4118-17-18</b>                           |                                 | <b>50</b>    | <b>35</b>    | <b>62</b>                                              | <b>97</b>  | <b>15</b>                    | <b>10</b> | <b>18</b>  | <b>20.5</b> | <b>21.5</b> | <b>7.5</b>  |
|                                             |                                 | 15           | 11           | 28                                                     | 44         | 381                          | 254       | 457        | 521         | 546         | 190         |
| <b>4124-17-18</b>                           |                                 | <b>100</b>   | <b>50</b>    | <b>72</b>                                              | <b>107</b> | <b>21</b>                    | <b>16</b> | <b>18</b>  | <b>20.5</b> | <b>27.5</b> | <b>13.5</b> |
|                                             |                                 | 30           | 15           | 33                                                     | 49         | 533                          | 406       | 457        | 521         | 699         | 343         |
| <b>4130-17-18</b>                           |                                 | <b>150</b>   | <b>75</b>    | <b>83</b>                                              | <b>118</b> | <b>27</b>                    | <b>22</b> | <b>18</b>  | <b>20.5</b> | <b>33.5</b> | <b>19.5</b> |
|                                             |                                 | 46           | 23           | 38                                                     | 54         | 686                          | 559       | 457        | 521         | 851         | 495         |
| <b>4138-17-18</b>                           |                                 | <b>200</b>   | <b>100</b>   | <b>96</b>                                              | <b>131</b> | <b>35</b>                    | <b>30</b> | <b>18</b>  | <b>20.5</b> | <b>41.5</b> | <b>27.5</b> |
|                                             |                                 | 61           | 30           | 44                                                     | 59         | 889                          | 762       | 457        | 521         | 1054        | 698         |

### Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown.
- Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models:

|                  | Net lbs/kg    | Ship lbs/kg   |
|------------------|---------------|---------------|
| <b>Electric</b>  | <b>18/8.2</b> | <b>18/8.2</b> |
| <b>Hydraulic</b> | <b>15/6.8</b> | <b>15/6.8</b> |
| <b>Air</b>       | <b>15/6.8</b> | <b>15/6.8</b> |

- Dimension "F" is the overall length of standard model reels.

- When ordering standard gear rewind models, prefix model number with:

**G** = Gear Rewind.

When ordering power rewind models, prefix model number with:

**A** = Air Rewind –  
Supplied with control valve and 18" air hose.

**E** = Electric Rewind –  
12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately.


**HD** = Hydraulic Rewind –  
Not supplied with control valve.

- Finish:** Refer to page 3.

- Be sure to check dimensions and weights prior to ordering.**

**NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.

\*\*\* X, Y indicate mounting holes. See page 5.

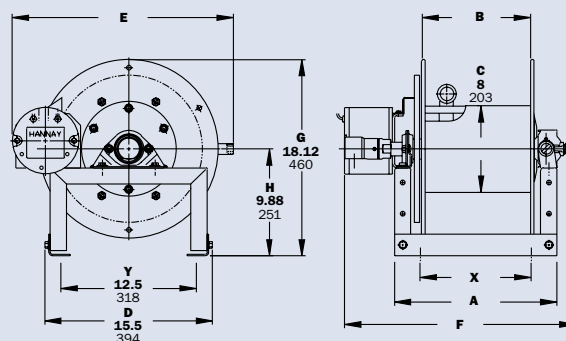

Power rewind shown



## Series 6000

- Fuel Dispensing (Consult Factory) • Fire Protection
- Spray Operations • Water Blasting\* • Sewer Cleaning\*

### To handle single 1/2" through 1" I.D. hose.

- Heavy-duty reel for longer lengths of hose.
- Choose gear-driven crank rewind or chain and sprocket drive powered by an electric, hydraulic or compressed air motor.
- Crank rewind reels supplied with pinion brake; power rewind reels with a strap brake.
- Standard inlet: 90° ball bearing swivel joint, 1" female NPT threads.
- Standard outlet: 1" female NPT threads.
- Standard: inlet, outlet riser, and hub assembly are steel. Options: swivel joint also available in aluminum or stainless steel. Riser and hub assembly also available in stainless steel.
- Standard pressures to 2000 psi (138 bar), available up to 5000 psi (345 bar) – must specify.
- Temperatures from -60°F to +250°F (-51°C to +121°C).
- Rollers and roller mounting brackets are accessory items. Specify roller position.
- Consult factory for optional chain guard.

\* Heavy-duty construction required for water blasting and sewer cleaning applications. Consult factory.



Electric rewind  
Standard  
configuration  
shown



### Optional Auxiliary Rewind

Ring and pinion shaft rewind unit with removable crank handle.



Optional Assembly  
C2 roller top wind and  
auxiliary rewind shown

# Series 6000

- Fuel Dispensing (Consult Factory) • Fire Protection
- Spray Operations • Water Blasting\* • Sewer Cleaning\*

## PARTS DRAWING – ISO 84

| Model Number<br>For power rewind<br>see Note 5 | Hose Capacity of Reel<br>feet m |           |              |              | Approx. Weight<br>Crank Rewind<br>lb. kg<br>see Note 4 |      | Reel Dimensions***<br>In. mm |      |       |       |            |            |       |      |       |   |
|------------------------------------------------|---------------------------------|-----------|--------------|--------------|--------------------------------------------------------|------|------------------------------|------|-------|-------|------------|------------|-------|------|-------|---|
|                                                | I.D. in.<br>mm                  | 1/2<br>13 | 3/4<br>19    | 1<br>25      | NET                                                    | SHIP | A                            | B    | D     | E     | F<br>CRANK | F<br>POWER | G     | H    | X     | Y |
|                                                | O.D. in.<br>mm                  | 7/8<br>22 | 1-9/32<br>33 | 1-9/16<br>40 |                                                        |      |                              |      |       |       |            |            |       |      |       |   |
| 6024-19-21                                     | 200                             | 100       | 60           | 85           | 127                                                    | 21   | 15.5                         | 20.5 | 18.75 | 25.38 | 28.5       | 21.5       | 12.12 | 13   | 16.75 |   |
|                                                | 61                              | 30        | 18           | 39           | 58                                                     | 533  | 394                          | 521  | 476   | 645   | 724        | 546        | 308   | 330  | 425   |   |
| 6032-19-21                                     | 350                             | 175       | 85           | 102          | 144                                                    | 29.5 | 24                           | 20.5 | 18.75 | 33.88 | 37         | 21.5       | 12.12 | 21.5 | 16.75 |   |
|                                                | 107                             | 53        | 26           | 46           | 65                                                     | 749  | 610                          | 521  | 476   | 861   | 940        | 546        | 308   | 546  | 425   |   |
| 6024-23-24                                     | 400                             | 150       | 100          | 92           | 134                                                    | 21   | 15.5                         | 20.5 | 22.75 | 25.38 | 28.5       | 23.5       | 12.12 | 13   | 16.75 |   |
|                                                | 122                             | 46        | 30           | 42           | 61                                                     | 533  | 394                          | 521  | 578   | 645   | 724        | 597        | 308   | 330  | 425   |   |
| 6030-23-24                                     | -                               | 225       | 150          | 105          | 147                                                    | 27.5 | 22                           | 20.5 | 22.75 | 31.88 | 35         | 23.5       | 12.12 | 19.5 | 16.75 |   |
|                                                | -                               | 68        | 46           | 48           | 67                                                     | 699  | 559                          | 521  | 578   | 810   | 889        | 597        | 308   | 495  | 425   |   |
| 6038-23-24                                     | -                               | 300       | 175          | 120          | 162                                                    | 35   | 29.5                         | 20.5 | 22.75 | 39.38 | 42.5       | 23.5       | 12.12 | 27   | 16.75 |   |
|                                                | -                               | 91        | 53           | 54           | 73                                                     | 889  | 749                          | 521  | 578   | 1000  | 1080       | 597        | 308   | 686  | 425   |   |
| 6016-25-26                                     | 250                             | 100       | 60           | 88           | 130                                                    | 13   | 7.5                          | 25.5 | 24.75 | 17.38 | 20.5       | 27.88      | 15.5  | 7.75 | 21.75 |   |
|                                                | 76                              | 30        | 18           | 40           | 59                                                     | 330  | 191                          | 648  | 629   | 441   | 521        | 708        | 394   | 197  | 552   |   |
| 6022-25-26                                     | 450                             | 175       | 100          | 100          | 142                                                    | 19   | 13.5                         | 25.5 | 24.75 | 23.38 | 26.5       | 27.88      | 15.5  | 11   | 21.75 |   |
|                                                | 137                             | 53        | 30           | 45           | 64                                                     | 483  | 343                          | 648  | 629   | 594   | 673        | 708        | 394   | 279  | 552   |   |
| 6028-25-26                                     | -                               | 275       | 175          | 113          | 155                                                    | 25.5 | 20                           | 25.5 | 24.75 | 29.88 | 33         | 27.88      | 15.5  | 17.5 | 21.75 |   |
|                                                | -                               | 84        | 53           | 51           | 70                                                     | 648  | 508                          | 648  | 629   | 759   | 838        | 708        | 394   | 445  | 552   |   |
| 6018-30-31                                     | 400                             | 200       | 125          | 101          | 151                                                    | 15   | 9.5                          | 25.5 | 28.75 | 19.38 | 22.5       | 29.88      | 15.5  | 7    | 21.75 |   |
|                                                | 122                             | 61        | 38           | 46           | 68                                                     | 381  | 241                          | 648  | 730   | 492   | 572        | 759        | 394   | 178  | 552   |   |
| 6024-30-31                                     | -                               | 350       | 175          | 113          | 163                                                    | 21   | 15.5                         | 25.5 | 28.75 | 25.38 | 28.5       | 29.88      | 15.5  | 13   | 21.75 |   |
|                                                | -                               | 107       | 53           | 51           | 74                                                     | 533  | 394                          | 648  | 730   | 645   | 724        | 759        | 394   | 330  | 552   |   |
| 6028-30-31                                     | -                               | 450       | 250          | 121          | 171                                                    | 25.5 | 20                           | 25.5 | 28.75 | 29.88 | 33         | 29.88      | 15.5  | 17.5 | 21.75 |   |
|                                                | -                               | 137       | 76           | 55           | 78                                                     | 648  | 508                          | 648  | 730   | 759   | 838        | 759        | 394   | 445  | 552   |   |
| † 6030-30-31                                   | -                               | 500       | 275          | 125          | 175                                                    | 27.5 | 22                           | 25.5 | 28.75 | 31.88 | 35         | 29.88      | 15.5  | 19.5 | 21.75 |   |
|                                                | -                               | 152       | 84           | 57           | 79                                                     | 699  | 559                          | 648  | 730   | 810   | 889        | 759        | 394   | 495  | 552   |   |
| † 6028-33-34                                   | -                               | 550       | 300          | 129          | 179                                                    | 25   | 20                           | 31.5 | 31.75 | 29.62 | 32.75      | 33.62      | 17.75 | 17.5 | 27.75 |   |
|                                                | -                               | 168       | 91           | 59           | 81                                                     | 635  | 508                          | 800  | 806   | 752   | 832        | 854        | 451   | 445  | 705   |   |

### Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
- Dimensions shown for reels up to and including 30-31 disc size reflect pressed frames. All others are rollformed channel frames.
- Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models.

|           | Net lbs/kg | Ship lbs/kg |
|-----------|------------|-------------|
| Electric  | 40/18.1    | 40/18.1     |
| Hydraulic | 20/9.1     | 20/9.1      |
| Air       | 20/9.1     | 20/9.1      |

- When ordering power rewind models, prefix model number with:
  - A** = Air Rewind – Supplied with control valve and 18" air hose.
  - EP** = Electric Rewind (1/2 HP) – 12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately.
  - HD** = Hydraulic Rewind – Not supplied with control valve.

6. Finish: Refer to page 3.


7. Be sure to check dimensions and weights prior to ordering.

**NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.

\*\*\* X, Y indicate mounting holes.

See page 5.

† Some applications require a clutch/reduction unit.

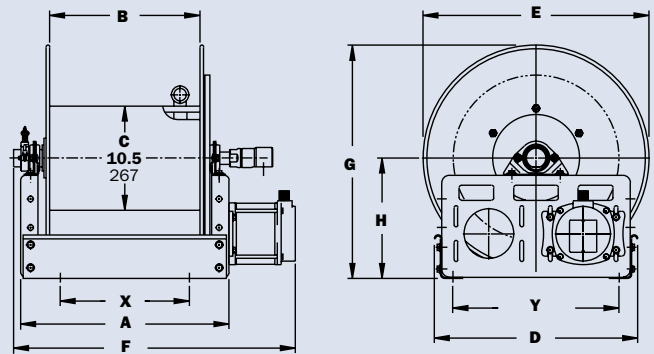

Power rewind shown

## Series 7000 | Dual Hose

• Hydraulics • Dual Agents

### To handle dual 3/4" or 1" I.D. hose.

- Two swivel joint inlets and two outlet risers to handle two equal lengths of hose.
- Choose gear-driven crank rewind or chain and sprocket drive powered by an electric, hydraulic or compressed air motor. An auxiliary rewind is standard.
- Crank rewind and power rewind reels, pinion brake is standard.
- Standard inlets: 90° ball bearing swivel joints, 1" female NPT threads.
- Standard outlets: 1" female NPT threads.
- Standard: inlet, outlet riser, and hub assembly are steel. Options: swivel joint also available in aluminum or stainless steel. Riser and hub assembly also available in stainless steel.
- Standard pressures to 2000 psi (138 bar), available up to 5000 psi (345 bar) – must specify.
- Temperatures from -60°F to +250°F (-51°C to +121°C).
- Consult factory for optional chain guard.



Standard configuration shown

### PARTS DRAWING – ISO 72

| Model Number<br>For power rewind see Note 5 | Hose Capacity of Reel<br>feet m |              |              | Approx. Weight<br>Crank Rewind<br>lb. kg<br>see Note 4 |                     | Reel Dimensions***<br>in. mm |             |             |              |              |              |              |              |             |              |
|---------------------------------------------|---------------------------------|--------------|--------------|--------------------------------------------------------|---------------------|------------------------------|-------------|-------------|--------------|--------------|--------------|--------------|--------------|-------------|--------------|
|                                             | I.D. in.<br>mm                  | 3/4<br>19    | 1<br>25      | NET                                                    | Freight<br>SHIP Wt. | A                            | B           | D           | E            | F<br>CRANK   | F<br>POWER   | G            | H            | X           | Y            |
|                                             | O.D. in.<br>mm                  | 1-9/32<br>33 | 1-9/16<br>40 |                                                        |                     |                              |             |             |              |              |              |              |              |             |              |
| <b>7024-19-21</b>                           |                                 | <b>2/60</b>  | <b>2/25</b>  | <b>100</b>                                             | <b>142</b>          | <b>21</b>                    | <b>15.5</b> | <b>20.5</b> | <b>21.88</b> | <b>29.75</b> | <b>32.12</b> | <b>21.5</b>  | <b>12.12</b> | <b>13</b>   | <b>16.75</b> |
|                                             |                                 | 2/18         | 2/8          | 45                                                     | 64                  | 533                          | 394         | 521         | 556          | 756          | 816          | 546          | 308          | 330         | 425          |
| <b>7026-23-24</b>                           |                                 | <b>2/90</b>  | <b>2/50</b>  | <b>105</b>                                             | <b>147</b>          | <b>23</b>                    | <b>17.5</b> | <b>20.5</b> | <b>23</b>    | <b>31.75</b> | <b>34.12</b> | <b>23.5</b>  | <b>12.12</b> | <b>15</b>   | <b>16.75</b> |
|                                             |                                 | 2/27         | 2/15         | 48                                                     | 67                  | 584                          | 445         | 521         | 584          | 806          | 867          | 597          | 308          | 381         | 425          |
| <b>7016-25-26</b>                           |                                 | <b>2/40</b>  | <b>2/30</b>  | <b>95</b>                                              | <b>145</b>          | <b>13</b>                    | <b>7.5</b>  | <b>25.5</b> | <b>24.75</b> | <b>21.75</b> | <b>24.12</b> | <b>27.88</b> | <b>15.5</b>  | <b>7.75</b> | <b>21.75</b> |
|                                             |                                 | 2/12         | 2/9          | 43                                                     | 66                  | 330                          | 191         | 648         | 629          | 552          | 613          | 708          | 394          | 197         | 552          |
| <b>7032-25-26</b>                           |                                 | <b>2/175</b> | <b>2/100</b> | <b>129</b>                                             | <b>179</b>          | <b>29.5</b>                  | <b>24</b>   | <b>25.5</b> | <b>24.75</b> | <b>38.25</b> | <b>40.62</b> | <b>27.88</b> | <b>15.5</b>  | <b>21.5</b> | <b>21.75</b> |
|                                             |                                 | 2/53         | 2/31         | 59                                                     | 81                  | 749                          | 610         | 648         | 629          | 972          | 1032         | 708          | 394          | 546         | 552          |
| <b>†7032-30-31</b>                          |                                 | <b>2/300</b> | <b>2/150</b> | <b>137</b>                                             | <b>187</b>          | <b>29.5</b>                  | <b>24</b>   | <b>25.5</b> | <b>28.75</b> | <b>38.25</b> | <b>40.62</b> | <b>29.88</b> | <b>15.5</b>  | <b>21.5</b> | <b>21.75</b> |
|                                             |                                 | 2/91         | 2/46         | 62                                                     | 85                  | 749                          | 610         | 648         | 730          | 972          | 1032         | 759          | 394          | 546         | 552          |
| <b>†7024-33-34</b>                          |                                 | <b>2/225</b> | <b>2/115</b> | <b>120</b>                                             | <b>170</b>          | <b>20.5</b>                  | <b>15.5</b> | <b>31.5</b> | <b>31.75</b> | <b>29.75</b> | <b>32.12</b> | <b>33.62</b> | <b>17.75</b> | <b>13</b>   | <b>27.75</b> |
|                                             |                                 | 2/69         | 2/35         | 54                                                     | 77                  | 521                          | 394         | 800         | 806          | 756          | 816          | 854          | 451          | 330         | 705          |
| <b>†7032-33-34</b>                          |                                 | <b>2/350</b> | <b>2/200</b> | <b>137</b>                                             | <b>187</b>          | <b>29</b>                    | <b>24</b>   | <b>31.5</b> | <b>31.75</b> | <b>38.25</b> | <b>40.62</b> | <b>33.62</b> | <b>17.75</b> | <b>21.5</b> | <b>27.75</b> |
|                                             |                                 | 2/107        | 2/61         | 62                                                     | 85                  | 737                          | 610         | 800         | 806          | 972          | 1032         | 854          | 451          | 546         | 705          |

#### Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
- Dimensions shown for reels up to and including 30-31 disc size reflect pressed frames. All others are rollformed channel frames.
- Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models.

|                  | Net lbs/kg     | Ship lbs/kg    |
|------------------|----------------|----------------|
| <b>Electric</b>  | <b>40/18.1</b> | <b>40/18.1</b> |
| <b>Hydraulic</b> | <b>20/9.1</b>  | <b>20/9.1</b>  |
| <b>Air</b>       | <b>20/9.1</b>  | <b>20/9.1</b>  |

- When ordering, prefix model number with:

- A** = Air Rewind – Supplied with control valve and 18" air hose.
- EP** = Electric Rewind (1/2 HP) – 12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately.
- HD** = Hydraulic Rewind – Not supplied with control valve.
- MX** = Chain-Driven Crank.


- Finish:** Refer to page 3.

- Be sure to check dimensions and weights prior to ordering.**

**NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.

\*\*\* X, Y indicate mounting holes. See page 5.

† Some applications require a clutch/reduction unit.

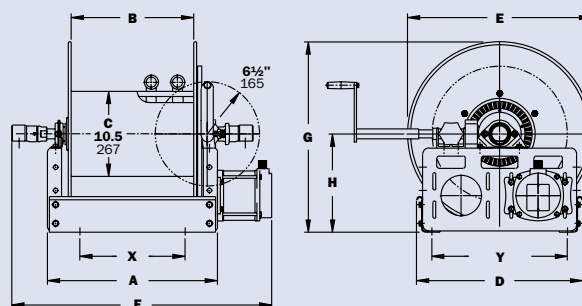

Power rewind shown

# Series 7500

- Fuel Dispensing (Consult Factory) • Bulk Transfer
- Suction/Discharge (Consult Factory)

## To handle single 1" through 1-1/2" I.D. hose.

- Choose gear-driven crank rewind or chain and sprocket drive powered by an electric, hydraulic or compressed air motor.
- Crank rewind reels supplied with pinion brake and power rewind reels with a strap brake.
- Standard inlet: 90° ball bearing swivel joint, 1-1/2" female NPT threads, and 2" Victaulic® groove.
- Standard outlet: flanged riser, 1-1/2" female NPT threads.
- Standard: inlet, outlet riser, and hub assembly are steel. Options: also available in aluminum or stainless steel.
- Standard pressures to 600 psi (41 bar), available up to 1000 psi (69 bar) – must specify.
- Temperatures from -25°F to +250°F (-32°C to +121°C), optional temperatures to +400°F (+204°C) – must specify.
- Rollers and roller mounting brackets are accessory items. Specify roller position.
- Consult factory for optional chain guard.



Optional left top configuration shown; right top is standard



### Optional Auxiliary Rewind

Ring and pinion shaft rewind unit with removable crank handle.

## PARTS DRAWING – ISO 18

| Model Number<br>For power rewind see Note 5 | Hose Capacity of Reel<br>feet m |              |               |              | Approx. Weight<br>Crank Rewind<br>lb. kg<br>see Note 4 |      | Reel Dimensions***<br>in. mm |      |      |       |            |            |       |       |      |       |
|---------------------------------------------|---------------------------------|--------------|---------------|--------------|--------------------------------------------------------|------|------------------------------|------|------|-------|------------|------------|-------|-------|------|-------|
|                                             | I.D. in.<br>mm                  | 1<br>25      | 1-1/4<br>32   | 1-1/2<br>38  | NET                                                    | SHIP | A                            | B    | D    | E     | F<br>CRANK | F<br>POWER | G     | H     | X    | Y     |
|                                             | O.D. in.<br>mm                  | 1-9/16<br>40 | 1-13/16<br>46 | 2-1/16<br>52 |                                                        |      |                              |      |      |       |            |            |       |       |      |       |
| 7528-19-21                                  | 75                              | 70           | 50            | 104          | 146                                                    |      | 25.5                         | 20   | 20.5 | 18.75 | 32         | 33         | 21.5  | 12.12 | 17.5 | 16.75 |
|                                             | 23                              | 21           | 15            | 47           | 66                                                     |      | 648                          | 508  | 521  | 476   | 813        | 838        | 546   | 308   | 445  | 425   |
| 7538-23-24                                  | 200                             | 175          | 100           | 130          | 172                                                    |      | 35                           | 29.5 | 20.5 | 22.75 | 41.5       | 42.5       | 23.5  | 12.12 | 27   | 16.75 |
|                                             | 61                              | 53           | 30            | 59           | 78                                                     |      | 889                          | 749  | 521  | 578   | 1054       | 1080       | 597   | 308   | 686  | 425   |
| 7520-25-26                                  | 100                             | 75           | 50            | 106          | 148                                                    |      | 17                           | 11.5 | 25.5 | 24.75 | 23.5       | 24.5       | 27.88 | 15.5  | 9    | 21.75 |
|                                             | 30                              | 23           | 15            | 48           | 67                                                     |      | 432                          | 292  | 648  | 629   | 597        | 622        | 708   | 394   | 229  | 552   |
| 7528-25-26                                  | 175                             | 150          | 100           | 123          | 165                                                    |      | 25.5                         | 20   | 25.5 | 24.75 | 32         | 33         | 27.88 | 15.5  | 17.5 | 21.75 |
|                                             | 53                              | 46           | 30            | 56           | 75                                                     |      | 648                          | 508  | 648  | 629   | 813        | 838        | 708   | 394   | 445  | 552   |
| 7522-30-31                                  | 175                             | 125          | 100           | 118          | 168                                                    |      | 19                           | 13.5 | 25.5 | 28.75 | 25.5       | 26.5       | 29.88 | 15.5  | 11   | 21.75 |
|                                             | 53                              | 38           | 30            | 54           | 76                                                     |      | 483                          | 343  | 648  | 730   | 648        | 673        | 759   | 394   | 279  | 552   |
| †7528-30-31                                 | 250                             | 200          | 150           | 131          | 181                                                    |      | 25.5                         | 20   | 25.5 | 28.75 | 32         | 33         | 29.88 | 15.5  | 17.5 | 21.75 |
|                                             | 76                              | 61           | 46            | 59           | 82                                                     |      | 648                          | 508  | 648  | 730   | 813        | 838        | 759   | 394   | 445  | 552   |
| †7526-33-34                                 | 300                             | 200          | 175           | 133          | 183                                                    |      | 22.5                         | 17.5 | 31.5 | 31.75 | 29.25      | 30.25      | 33.62 | 17.75 | 15   | 27.75 |
|                                             | 91                              | 61           | 53            | 60           | 83                                                     |      | 572                          | 445  | 800  | 806   | 743        | 768        | 854   | 451   | 381  | 705   |

### Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
- Dimensions shown for reels up to and including 30-31 disc size reflect pressed frames. All others are rollformed channel frames.
- Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models.

|           | Net lbs/kg | Ship lbs/kg |
|-----------|------------|-------------|
| Electric  | 40/18.1    | 40/18.1     |
| Hydraulic | 20/9.1     | 20/9.1      |
| Air       | 20/9.1     | 20/9.1      |

5. When ordering, prefix model number with:

- A** = Air Rewind – Supplied with control valve and 18" air hose.
- EP** = Electric Rewind (1/2 HP) – 12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately.
- HD** = Hydraulic Rewind – Not supplied with control valve.


6. Finish: Refer to page 3.

7. Be sure to check dimensions and weights prior to ordering.

**NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.

\*\*\* X, Y indicate mounting holes. See page 5.

†Some applications require a clutch/reduction unit.

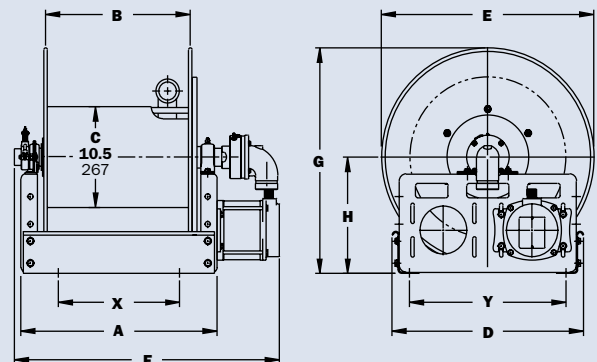

Power rewind shown

## Series 8000

- Bulk Transfer • Fueling Applications (Refer to Aviation Catalog H-0418-AVIA, Petroleum Catalog H-0417-FD)
- Chemical Transfer • General Dispensing • Suction/Discharge (Consult Factory)

### To handle single 1-1/2" or 2" I.D. hose.

- Heavy-duty reel designed for longer lengths and larger diameters of hose through 2" I.D.
- Choose gear-driven crank rewind or chain and sprocket drive powered by an electric, hydraulic or compressed air motor.
- Crank rewind reels supplied with a pinion brake; power rewind reels with a strap brake.
- Standard inlet: 90° ball bearing swivel joint, 2" female NPT threads.
- Standard outlet: flanged riser, 2" female NPT threads.
- Standard: inlet, outlet riser, and hub assembly are steel. Options: also available in aluminum or stainless steel.
- Pressures to 600 psi (41 bar).
- Temperatures from -25°F to +250°F (-32°C to +121°C), optional temperatures to +400°F (+204°C) – must specify.
- Consult factory for other pressures and temperatures.
- Rollers and roller mounting brackets are accessory items. Specify roller position.
- Consult factory for optional chain guard.



Standard configuration shown



### Chain Clutch-Reduction Units

For use on reels with disc diameter 39" or larger and/or when increased torque and slower rewind speeds are required. Factory installed when specified or available as an accessory item.

### PARTS DRAWING – ISO 35

| Model Number<br><br>For power rewind<br>see Note 4 | Hose Capacity of Reel<br>feet m |              |              | Approx. Weight<br>Crank Rewind<br>lb. kg<br>see Note 3 |       | Reel Dimensions***<br>in. mm |      |       |       |            |            |       |       |       |   |
|----------------------------------------------------|---------------------------------|--------------|--------------|--------------------------------------------------------|-------|------------------------------|------|-------|-------|------------|------------|-------|-------|-------|---|
|                                                    | I.D. in.<br>mm                  | 1-1/2<br>38  | 2<br>51      | NET                                                    | SHIP  | A                            | B    | D     | E     | F<br>CRANK | F<br>POWER | G     | H     | X     | Y |
|                                                    | O.D. in.<br>mm                  | 2-1/16<br>52 | 2-9/16<br>65 |                                                        |       |                              |      |       |       |            |            |       |       |       |   |
| 8234-26-27                                         | 80                              | 60           | 120          | 170                                                    | 26.25 | 20                           | 27   | 25.75 | 33.75 | 34.75      | 26.62      | 13.75 | 18.75 | 23.25 |   |
|                                                    | 24                              | 18           | 54           | 77                                                     | 667   | 508                          | 686  | 654   | 857   | 883        | 676        | 349   | 476   | 591   |   |
| 8238-26-27                                         | 100                             | 75           | 145          | 195                                                    | 30.25 | 24                           | 27   | 25.75 | 37.75 | 38.75      | 26.62      | 13.75 | 22.75 | 23.25 |   |
|                                                    | 30                              | 23           | 66           | 88                                                     | 768   | 610                          | 686  | 654   | 959   | 984        | 676        | 349   | 578   | 591   |   |
| 8246-26-27                                         | 145                             | 100          | 196          | 245                                                    | 38.25 | 32                           | 27   | 25.75 | 45.75 | 46.75      | 26.62      | 13.75 | 30.75 | 23.25 |   |
|                                                    | 44                              | 30           | 89           | 112                                                    | 972   | 813                          | 686  | 654   | 1162  | 1188       | 676        | 349   | 781   | 591   |   |
| 8226-33-34                                         | 85                              | 60           | 80           | 150                                                    | 17.75 | 11.5                         | 31.5 | 31.75 | 25.25 | 26.25      | 33.38      | 17.75 | 10.25 | 27.75 |   |
|                                                    | 26                              | 18           | 36           | 68                                                     | 451   | 292                          | 800  | 806   | 641   | 667        | 848        | 445   | 260   | 705   |   |
| 8234-33-34                                         | 150                             | 115          | 133          | 230                                                    | 26.25 | 20                           | 31.5 | 31.75 | 33.75 | 34.75      | 33.38      | 17.75 | 18.75 | 27.75 |   |
|                                                    | 46                              | 35           | 60           | 105                                                    | 667   | 508                          | 800  | 806   | 857   | 883        | 848        | 445   | 476   | 705   |   |
| 8238-39-40                                         | 340                             | 225          | 218          | 420                                                    | 30.25 | 24                           | 40   | 39    | 37.75 | 38.75      | 39.88      | 20.38 | 22.75 | 37    |   |
|                                                    | 104                             | 69           | 99           | 191                                                    | 768   | 610                          | 1016 | 991   | 959   | 984        | 1013       | 518   | 578   | 940   |   |

### Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
- Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models.


|                  | Net lbs/kg     | Ship lbs/kg    |
|------------------|----------------|----------------|
| <b>Electric</b>  | <b>40/18.1</b> | <b>40/18.1</b> |
| <b>Hydraulic</b> | <b>20/9.1</b>  | <b>20/9.1</b>  |
| <b>Air</b>       | <b>20/9.1</b>  | <b>20/9.1</b>  |

- When ordering power rewind models, prefix model number with:  
**A** = Air Rewind – Supplied with control valve and 25" air hose.  
**EP** = Electric Rewind (1/2 HP) – 12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately.  
**HD** = Hydraulic Rewind – Not supplied with control valve.

- Finish:** Refer to page 3.
- Be sure to check dimensions and weights prior to ordering.**

**NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.

\*\*\* X, Y indicate mounting holes. See page 5.

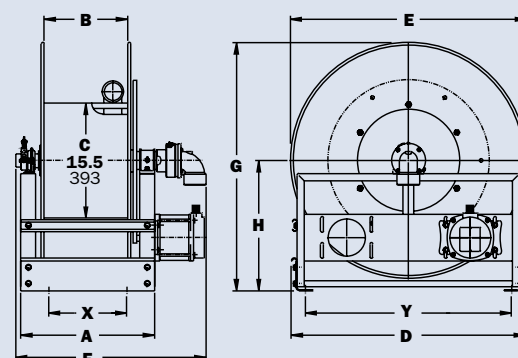

Power rewind shown



# Series 9000

- **Fueling Applications** (Refer to Aviation Catalog H-0418-AVIA, Petroleum Catalog H-0417-FD) • **Bulk Transfer**
- **Suction/Discharge** (Consult Factory) • **High Volume Application** • **Chemical Transfer**

## To handle 2" through 3" I.D. hose.

- Heavy-duty reel designed for longer lengths and larger diameters of hose through 3" I.D.
- Choose gear-driven crank rewind or chain and sprocket drive powered by an electric, hydraulic or compressed air motor.
- Crank rewind reels supplied with a pinion brake; power rewind reels with a strap brake.
- Standard inlet: 90° ball bearing swivel joint, 3" female NPT threads.
- Standard outlet: flanged riser, 3" female NPT threads.
- Standard: outlet riser, and hub assembly are aluminum with ductile inlet.
- Options: swivel joint also available in aluminum or stainless steel. Riser and hub assembly also available in stainless steel.
- Pressures to 300 psi (21 bar).
- Temperatures from -50°F to +180°F (-45°C to +82° C).
- Consult factory for other pressures and temperatures.
- Rollers and roller mounting brackets are accessory items. Specify roller position.
- Consult factory for optional chain guard.



Electric rewind  
Standard  
configuration  
shown



## Chain Clutch-Reduction Units

For use on reels with disc diameter 39" or larger and/or when increased torque and slower rewind speeds are required. Factory installed when specified or available as an accessory item.

## PARTS DRAWING – ISO 57

| Model Number<br>For power rewind<br>see Note 4 | Hose Capacity of Reel<br>feet m |                  |                  |                   | Approx. Weight<br>Crank Rewind<br>lb. kg<br>see Note 3 |                     | Reel Dimensions***<br>in. mm |                    |                     |                      |                      |                      |                     |                     |                     |   |
|------------------------------------------------|---------------------------------|------------------|------------------|-------------------|--------------------------------------------------------|---------------------|------------------------------|--------------------|---------------------|----------------------|----------------------|----------------------|---------------------|---------------------|---------------------|---|
|                                                | I.D. in.<br>mm                  | 2<br>51          | 2-1/2<br>64      | 3<br>76           | NET                                                    | SHIP                | A                            | B                  | D                   | E                    | F<br>CRANK           | F<br>POWER           | G                   | H                   | X                   | Y |
|                                                | O.D. in.<br>mm                  | 2-9/16<br>65     | 3-3/16<br>81     | 3-3/4<br>95       |                                                        |                     |                              |                    |                     |                      |                      |                      |                     |                     |                     |   |
| <b>9332-33-34</b>                              | <b>70</b><br>21                 | <b>30</b><br>9   | <b>25</b><br>8   | <b>147</b><br>67  | <b>217</b><br>98                                       | <b>23.75</b><br>603 | <b>17.5</b><br>445           | <b>31.5</b><br>800 | <b>31.75</b><br>80  | <b>33.75</b><br>857  | <b>33.25</b><br>845  | <b>33.88</b><br>861  | <b>18</b><br>457    | <b>16.25</b><br>413 | <b>27.75</b><br>705 |   |
| <b>9338-33-34</b>                              | <b>100</b><br>30                | <b>45</b><br>14  | <b>35</b><br>11  | <b>187</b><br>85  | <b>257</b><br>117                                      | <b>30.25</b><br>768 | <b>24</b><br>610             | <b>31.5</b><br>800 | <b>31.75</b><br>807 | <b>40.25</b><br>1022 | <b>39.75</b><br>1010 | <b>33.88</b><br>861  | <b>18</b><br>457    | <b>22.75</b><br>578 | <b>27.75</b><br>705 |   |
| <b>9346-33-34</b>                              | <b>140</b><br>43                | <b>60</b><br>18  | <b>50</b><br>15  | <b>237</b><br>108 | <b>372</b><br>169                                      | <b>38.25</b><br>972 | <b>32</b><br>813             | <b>31.5</b><br>800 | <b>31.75</b><br>807 | <b>48.25</b><br>1226 | <b>47.75</b><br>1213 | <b>33.88</b><br>861  | <b>18</b><br>457    | <b>30.75</b><br>781 | <b>27.75</b><br>705 |   |
| <b>9338-39-40</b>                              | <b>185</b><br>56                | <b>90</b><br>27  | <b>80</b><br>24  | <b>239</b><br>108 | <b>480</b><br>218                                      | <b>30.25</b><br>768 | <b>24</b><br>610             | <b>40</b><br>1016  | <b>39</b><br>991    | <b>40.25</b><br>1022 | <b>39.75</b><br>1010 | <b>40.38</b><br>1026 | <b>20.88</b><br>530 | <b>22.75</b><br>578 | <b>37</b><br>940    |   |
| <b>9334-45-46</b>                              | <b>200</b><br>61                | <b>130</b><br>40 | <b>115</b><br>35 | <b>361</b><br>164 | <b>525</b><br>239                                      | <b>26.25</b><br>667 | <b>20</b><br>508             | <b>46</b><br>1168  | <b>45</b><br>1143   | <b>36.25</b><br>921  | <b>35.75</b><br>908  | <b>46.38</b><br>1178 | <b>23.88</b><br>607 | <b>18.75</b><br>476 | <b>43</b><br>1092   |   |

### Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
- Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models.


|                  | Net lbs/kg     | Ship lbs/kg    |
|------------------|----------------|----------------|
| <b>Electric</b>  | <b>40/18.1</b> | <b>40/18.1</b> |
| <b>Hydraulic</b> | <b>20/9.1</b>  | <b>20/9.1</b>  |
| <b>Air</b>       | <b>20/9.1</b>  | <b>20/9.1</b>  |

- When ordering power rewind models, prefix model number with:  
**A** = Air Rewind –  
Supplied with control valve and 25" air hose.  
**EP** = Electric Rewind (1/2 HP) –  
12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately.  
**HD** = Hydraulic Rewind –  
Not supplied with control valve.

- Finish:** Refer to page 3.
- Be sure to check dimensions and weights prior to ordering.**

**NOTICE:** A flexible connector must be used between the inlet pipe and the inlet swivel joint.

\*\*\* X, Y indicate mounting holes. See page 5.

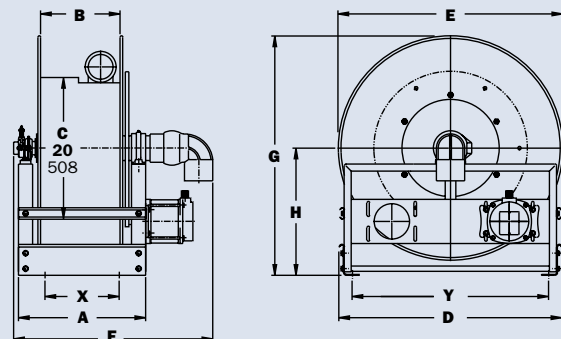

Power rewind shown

## Series 1100/AT1200

- Grounds Maintenance • Restaurants/Hotels
- Washdown Operations • Home Use

### To handle 3/8" through 1" I.D. hose.

- Continuous flow reels with swivel joint inlet, fluid hub, outlet riser.
- Direct crank rewind and cam-lock brake.
- One-piece foot and removable steel handlebar.
- Permanently attached crank.
- **GH** prefix to model number (e.g., GH1100, GHAT1200) includes garden hose thread on outlet, 5' lead-in hose, hose end clips.

#### Model 1100

- Standard inlet: 90° ball bearing swivel joint, 1/2" female NPT threads.
- Standard outlet: 1/2" female NPT threads.
- Pressures to 3000 psi (207 bar).
- Temperatures from +20°F to +400°F (-7°C to +204°C).
- Rubber tires standard.

#### Model AT1200

- Standard inlet: 90° balance pressure swivel joint, 1" female NPT threads.
- Standard outlet: 1" female NPT threads.
- Standard pressures to 2000 psi (138 bar), available up to 4000 psi (276 bar) – must specify.
- Temperatures from -40°F to +250°F (-40°C to +121°C).
- Pneumatic tires standard.




### PARTS DRAWING – 1100–ISO 48; AT1200–ISO 87

| Model Number | Hose Capacity of Reel<br>feet m |           |           |           |              |              | Approx. Weight<br>lb. kg |      | Reel Dimensions<br>in. mm |      |     |       |       |       |      |       |
|--------------|---------------------------------|-----------|-----------|-----------|--------------|--------------|--------------------------|------|---------------------------|------|-----|-------|-------|-------|------|-------|
|              | I.D. in.<br>mm                  | 3/8<br>10 | 1/2<br>13 | 5/8<br>16 | 3/4<br>19    | 1<br>25      | NET                      | SHIP | A                         | B    | C   | D     | E     | F     | G    | H     |
|              | O.D. in.<br>mm                  | 3/4<br>19 | 7/8<br>22 | 1<br>25   | 1-9/32<br>33 | 1-9/16<br>40 |                          |      |                           |      |     |       |       |       |      |       |
| 1100         |                                 | 275       | 175       | 125       | –            | –            | 47                       | 100* | 21.5                      | 12   | 6   | 21    | 16.5  | 24.62 | 39   | 13.81 |
|              |                                 | 84        | 53        | 38        | –            | –            | 21                       | 46   | 546                       | 305  | 152 | 533   | 419   | 625   | 991  | 351   |
| AT1200       |                                 | –         | 350       | 250       | 150          | 100          | 86                       | 147* | 24.88                     | 11.5 | 8   | 23.31 | 22.75 | 26.5  | 40   | 17.25 |
|              |                                 | –         | 107       | 76        | 46           | 30           | 39                       | 67   | 632                       | 292  | 203 | 592   | 578   | 673   | 1016 | 438   |

#### Notes:

1. Specifications subject to change.
2. Some assembly required.
3. **Finish:** Refer to page 3.
4. **Be sure to check dimensions and weights prior to ordering.**

\*Dimensional weight applies when shipped as a parcel package (via FedEx or UPS Ground).

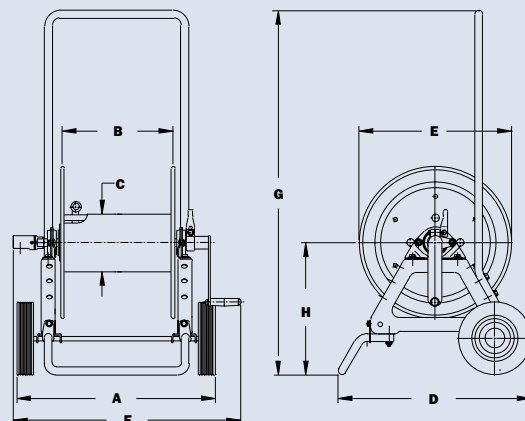

GH1100 shown

# Series C1150/ATC1250

- Industrial Maintenance • Construction
- Agriculture • Grounds Maintenance

## For storage of hose, cable, rope or wire.

- Direct crank rewind.
- One-piece foot and removable steel handlebar.
- Supplied with a cam-lock drag brake.

### Model C1150

- A 1-1/8" x 2-3/8" (28 mm x 60 mm) opening in the drum to initiate winding.
- Rubber tires standard.

### Model ATC1250

- A larger version of the C1150 with a 4-1/2" x 9" (114 mm x 229 mm) drum opening.
- Pneumatic tires standard.



### Optional Folding Handle

For compact storage



C1150  
standard  
configuration  
shown



ATC1250  
standard  
configuration  
shown


## PARTS DRAWING – C1150–ISO 48; ATC1250–ISO 87

| Model Number   | Cable Capacity of Reel<br>feet m |                            |      |      |      | Approx. Weight<br>lb. kg |      | Reel Dimensions<br>in. mm |      |     |       |       |       |      |       |
|----------------|----------------------------------|----------------------------|------|------|------|--------------------------|------|---------------------------|------|-----|-------|-------|-------|------|-------|
|                | O.D. in.<br>mm                   | Gauge/Number of Conductors |      |      |      | NET                      | SHIP | A                         | B    | C   | D     | E     | F     | G    | H     |
|                |                                  | 16/3                       | 14/3 | 12/3 | 10/3 |                          |      |                           |      |     |       |       |       |      |       |
| <b>C1150</b>   |                                  | .390                       | .530 | .600 | .690 |                          |      |                           |      |     |       |       |       |      |       |
|                | 10                               | 14                         | 15   | 18   |      |                          |      |                           |      |     |       |       |       |      |       |
| <b>ATC1250</b> |                                  | 1100                       | 500  | 400  | 300  | 44                       | 100* | 21.5                      | 12   | 6   | 21    | 16.5  | 24.25 | 39   | 13.81 |
|                |                                  | 335                        | 152  | 122  | 91   | 20                       | 46   | 546                       | 305  | 152 | 533   | 419   | 616   | 991  | 351   |
| <b>ATC1250</b> |                                  | 1800                       | 950  | 750  | 550  | 84                       | 147* | 24.88                     | 11.5 | 8   | 23.31 | 22.75 | 26.5  | 40   | 17.25 |
|                |                                  | 549                        | 290  | 229  | 168  | 38                       | 67   | 32                        | 292  | 203 | 592   | 578   | 673   | 1016 | 438   |

### Notes:

1. Specifications subject to change.
2. Some assembly required.
3. When ordering specify model number, O.D., length, and weight of cable, hose, etc.
4. **Finish:** Refer to page 3.
5. **Be sure to check dimensions and weights prior to ordering.**

\*Dimensional weight applies when shipped as a parcel package (via FedEx or UPS Ground).

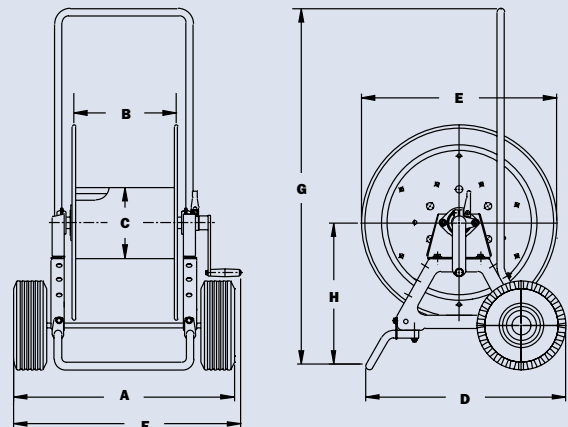

ATC1250 Shown

## Series C1500

• Hose • Rope • Cable • Wire

### To handle single 1/4" through 1" O.D.

- Reels are designed for storage of long lengths of hose, cable, rope, wire or other materials.
- A 1-1/8" x 2-3/8" (28 mm x 60 mm) opening in the drum to initiate winding.
- Direct crank rewind, permanently attached. Removable crank option is available. Also available is a chain and sprocket rewind powered by electric, compressed air or hydraulic motor.
- Supplied with cam-lock brake on manual rewind models only.
- Optional divider discs can be placed at almost any point. Be sure to specify spacing of discs on your order.
- Rollers and roller mounting brackets are accessory items. Specify roller position.



#### Optional External Mounting Brackets

Part No. 9906.0027.  
Add 2-1/2" to the X dimensions shown in the chart.



Standard configuration with optional finish shown

### PARTS DRAWING – ISO 218

| Model Number<br><small>For power rewind see Note 5</small> | Hose Capacity of Reel<br>feet m |             |            |           |          | Approx. Weight<br>Crank Rewind<br>lb. kg<br><small>see Note 4</small> |                              |                        | Reel Dimensions***<br>in. mm |           |             |            |             |             |             |
|------------------------------------------------------------|---------------------------------|-------------|------------|-----------|----------|-----------------------------------------------------------------------|------------------------------|------------------------|------------------------------|-----------|-------------|------------|-------------|-------------|-------------|
|                                                            | O.D. in.<br>mm                  | 1/4<br>6    | 1/2<br>13  | 3/4<br>19 | 1<br>25  | NET                                                                   | UPS/<br>FedEx<br>SHIP<br>Wt. | Freight<br>SHIP<br>Wt. | A                            | B         | E<br>CRANK  | E<br>POWER | F<br>CRANK  | F<br>POWER  | X           |
| <b>C1514-17-18</b>                                         | 1300<br>396                     | 325<br>99   | 150<br>46  | 75<br>23  | 23<br>10 | 65*<br>30                                                             | 58<br>26                     |                        | 11<br>279                    | 6<br>152  | 16.5<br>419 | 19<br>483  | 17.5<br>445 | 16.5<br>491 | 9.5<br>241  |
| <b>C1520-17-18</b>                                         | –                               | 650<br>198  | 300<br>91  | 150<br>46 | 25<br>11 | 80*<br>36                                                             | 60<br>27                     |                        | 17<br>432                    | 12<br>305 | 16.5<br>419 | 19<br>483  | 23.5<br>597 | 22.5<br>572 | 15.5<br>394 |
| <b>C1526-17-18</b>                                         | –                               | 900<br>274  | 450<br>137 | 225<br>69 | 27<br>12 | 98*<br>45                                                             | 62<br>28                     |                        | 23<br>584                    | 18<br>457 | 16.5<br>419 | 19<br>483  | 29.5<br>749 | 28.5<br>724 | 21.5<br>546 |
| <b>C1530-17-18</b>                                         | –                               | 1000<br>305 | 550<br>168 | 275<br>84 | 29<br>13 | 110*<br>50                                                            | 64<br>29                     |                        | 27<br>686                    | 22<br>559 | 16.5<br>419 | 19<br>483  | 33.5<br>851 | 32.5<br>826 | 25.5<br>648 |


#### Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
- Dimensions reflect pressed frames.
- Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models (does not apply to FedEx or UPS):
 

|           | Net lbs/kg | Ship lbs/kg |
|-----------|------------|-------------|
| Electric  | 18/8.2     | 18/8.2      |
| Hydraulic | 15/6.8     | 15/6.8      |
| Air       | 15/6.8     | 15/6.8      |
- When ordering power rewind models, prefix model number with:
  - A = Air Rewind – Supplied with control valve and 18" air hose.
  - E = Electric Rewind – 12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately.
  - HD = Hydraulic Rewind – Not supplied with control valve.
- Finish: Refer to page 3.
- Be sure to check dimensions and weights prior to ordering.

\*Dimensional weight applies when shipped as a parcel package (via FedEx or UPS Ground).

\*\*\* X, Y indicate mounting holes. See page 5.

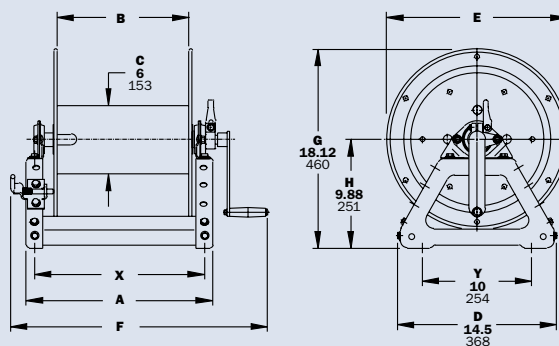

Crank rewind shown

# Series C3200

• Hose • Rope • Cable • Wire

## To handle single 1/2" through 1-1/2" O.D.

- A 4-1/2" x 9" (114mm x 229mm) opening in the drum to initiate winding.
- Designed for storage of long lengths of hose, cable, rope, wire or other materials.
- Choose disc rewind or removable direct crank rewind.
- Supplied with spring actuated pin lock.
- Optional divider discs can be placed at almost any point. Be sure to specify spacing of discs on your order.
- Rollers and roller mounting brackets are accessory items. Specify roller position.
- For power rewind, see Series C in cable reels catalog H0507-C.



Standard configuration with crank handle shown



### Optional Aluminum Hand Cart

4300-AL mounting available.


## PARTS DRAWING – ISO 117

| Model Number       | Hose Capacity of Reel<br>feet m |             |            |            |             |             | Approx. Weight<br>Crank Rewind<br>lb. kg |            | Reel Dimensions***<br>in. mm |            |              |             |              |             |             |
|--------------------|---------------------------------|-------------|------------|------------|-------------|-------------|------------------------------------------|------------|------------------------------|------------|--------------|-------------|--------------|-------------|-------------|
|                    | O.D. in.<br>mm                  | 1/2<br>13   | 3/4<br>19  | 1<br>25    | 1-1/4<br>32 | 1-1/2<br>38 | NET                                      | SHIP       | A                            | B          | E<br>CRANK   | F<br>CRANK  | G            | H           | X           |
| <b>C3218-25-26</b> | <b>1000</b>                     | <b>450</b>  | <b>225</b> | <b>125</b> | <b>90</b>   |             | <b>85</b>                                | <b>127</b> | <b>15</b>                    | <b>9.5</b> | <b>24.75</b> | <b>22</b>   | <b>27.88</b> | <b>15.5</b> | <b>7</b>    |
|                    | 305                             | 137         | 69         | 38         | 27          |             | 39                                       | 58         | 381                          | 241        | 629          | 559         | 708          | 394         | 178         |
| <b>C3228-25-26</b> | –                               | <b>1000</b> | <b>500</b> | <b>325</b> | <b>200</b>  |             | <b>109</b>                               | <b>151</b> | <b>25.5</b>                  | <b>20</b>  | <b>24.75</b> | <b>32.5</b> | <b>27.88</b> | <b>15.5</b> | <b>17.5</b> |
|                    | –                               | 305         | 152        | 99         | 61          |             | 49                                       | 68         | 648                          | 508        | 629          | 826         | 708          | 394         | 445         |
| <b>C3234-25-26</b> | –                               | <b>1300</b> | <b>650</b> | <b>400</b> | <b>275</b>  |             | <b>122</b>                               | <b>164</b> | <b>31.5</b>                  | <b>26</b>  | <b>24.75</b> | <b>38.5</b> | <b>27.88</b> | <b>15.5</b> | <b>23.5</b> |
|                    | –                               | 396         | 198        | 122        | 84          |             | 55                                       | 74         | 800                          | 660        | 629          | 978         | 708          | 394         | 597         |

### Notes:

1. Specifications subject to change.
2. Upon request, reels can be supplied with drum lengths other than shown and with disc sizes in other diameters.
3. Dimensions reflect pressed frames.
4. Series C3200 requires 3-1/2" clearance to remove crank handle.
5. Subtract 5" from "F" dimension for disc rewind on C3200 Series.
6. **Finish:** Refer to page 3.
7. **Be sure to check dimensions and weights prior to ordering.**

\*\*\* X, Y indicate mounting holes. See page 5.

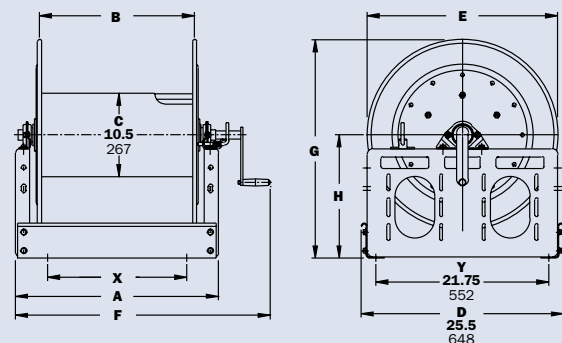




# You Can't Buy A Better Reel.

## Find reels for every need.


Learn more about all of our reels, including specs, drawings, and even how to select the right reels and accessories for your industry.



### Welding Reels

Includes specs and information on:


- Mobile and fixed installations
- Arc welding
- Gas welding
- Cutting operations



### Cable Reels

Find out more about:


- Manual and power rewind reels
- Storage reels
- Reels for live electric cable
- Portable reels
- Static and truck grounding reels



### Stainless Steel Reels

Comprehensive information on:


- Spring rewind reels
- Manual rewind reels
- Compact manual rewind reels
- Fuel reels



### Ordering & Accessory Guide

Learn more about:

- Selecting the right reel
- Reel components
- Available accessories
- How to spec and order reels and accessories
- Ordering options
- Hannay Reels policies



### Spray and Pressure Washing Hose Reels

Details and specs for:

- Pressure wash reels
- Manual, spring, and remote controlled power rewind reels
- Portable hose reels
- Small frame model reels

View all our reel catalogs online at [hannay.com](http://hannay.com)



Family owned and operated since 1933, Hannay Reels is the world leader in both OEM and aftermarket applications. Hannay offers thousands of standard hose reel and cable reel models, as well as unmatched custom capabilities. We can easily and affordably customize a reel to meet your exact specifications – built to last, delivered fast. Additional catalogs are available through your local Hannay Reels dealer or online at [hannay.com](http://hannay.com).



553 State Route 143 | Westerlo, New York 12193  
Email: [reels@hannay.com](mailto:reels@hannay.com) | [hannay.com](http://hannay.com)



All Hannay reels are constructed of quality heavy gauge steel (optional aluminum or stainless steel also available on most models).

Phone: **518-797-3791**  
Toll Free: **1-877-467-3357**

Domestic FAX: **1-800-733-5464**  
International FAX: **518-797-3259**

Form H-0308-H WEB REV 7-2016

